

Centro Circo

Designed, Developed &
Manufactured in the UK



Colour Finish



White
CE(3 or 4)/W




Satin Aluminium
CE(3 or 4)/F



Chrome
CE(3 or 4)/H



Brass
CE(3 or 4)/Z

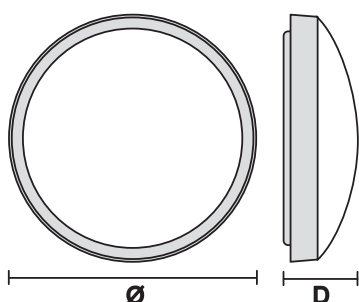

Size	CE3	CE4
Diameter	330mm	450mm
Depth	108mm	128mm

LED Types

- LED 1800.
- LED 3000.
- LED 4000.

Materials

- Fascia: Vandal resistant polycarbonate in white / satin aluminium / Chrome / brass finish. Other colours available on request. Metallic finishes indoor use only.
- Diffuser: Vandal resistant polycarbonate in premium opal with self-extinguishing fire properties.
- Body: Vandal resistant polycarbonate.
- Back light: Clear vandal resistant polycarbonate with self-extinguishing fire properties. Coloured options available.


Installation

- Wall or Ceiling Mount.
- Unique first fit polycarbonate base with snap fit gear tray.
- BESA fixing and rear cable entry. 3 way mains terminal block. 4 way terminal block for emergency versions.
- Quick fit clip on diffuser.
- Fast fit Twist-Lock fascia (with single retaining screw).


Standards

- IP54.
- 'F' Mark.
- CE.
- BS EN 60598.
- Class 1.

CE3/WL4LED1800



CE4/WL4LED3000



Code	Size	Colour	Diffuser	Colour Temp.	System Power	Delivered Lumens	Efficacy
CE3/WL4LED1800	330mm	White	Premium Opal	4000 K	16.7 W	1635 lm	98 lm/W
CE4/WL4LED3000	450mm	White	Premium Opal	4000 K	21.6 W	2335 lm	108 lm/W
CE4/WL4LED4000	450mm	White	Premium Opal	4000 K	32.7 W	3390 lm	103 lm/W

Code options (add suffix to code)



3 Hour Maintained Emergency
M (105 - 165 lm)



e-Motion™ Microwave Master Dim
-CFP



Night Light
CLED
Emergency Night Light Unavailable



Halo Options
White Halo CH(3 or 4)/_K
Red Halo CH(3 or 4)/_R
Blue Halo CH(3 or 4)/_U



Microwave On/Off
-9



e-Motion™ Microwave Slave Dim
-CFS



Switch Dim
-DD



Daylight Monitoring
-CFDP



DALI / DSI Dim
-DDD