

Rhapsody LED 1200 x 600

Designed, Developed &
Manufactured in the UK



Colour Finish



White
R12X6/**W**

LED Types

- LED 3000.
- LED 6000.
- LED 9000.

Materials


- Body: Steel in white RAL9016.
- Diffuser: Premium opal polycarbonate.

Installation

- Suitable for draw up and lay-in applications making it versatile for a number of ceiling systems including:
 - Exposed 'T'.
 - Concealed fix.
 - Some metal pan ceilings.
- Plug & Play options.

Standards


- IP20.
- 'F' Mark.
- CE.
- BS EN 60598.
- Class I.
- TPA Rated.

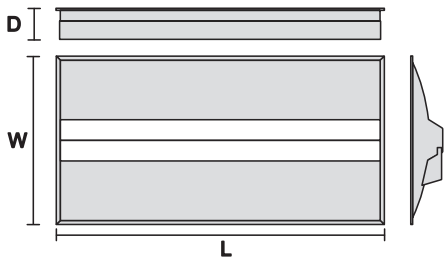


Size

Length	1197mm
Width	597mm
Depth	110mm

R12X6/WL4LED3000



R12X6/WL4LED6000



Code	Colour	Diffuser	Colour Temp.	System Power	Delivered Lumens	Efficacy
R12X6/WL4LED3000	White	Premium Opal	4000 K	28.7 W	3150 lm	110 lm/W
R12X6/WL4LED6000	White	Premium Opal	4000 K	54 W	6055 lm	112 lm/W
R12X6/WL4LED9000	White	Premium Opal	4000 K	105 W	10440 lm	99 lm/W

Code options (add suffix to code)



3 Hour Maintained Emergency
M (265 - 290 lm)



DALI / DSI Dim
-DDD



e-Motion™ Microwave Slave Dim
-CF



Analogue Dim
-DA



Self-Test Emergency
Prefix **R12X6ST/** Suffix **M**