

Corrido™ LED 1200

Designed, Developed & Manufactured in the UK



Colour Finish



White
CD12/**W**



Satin Aluminium*
CD12/**F**

*Minimum order quantity applies.

LED Types

- LED 3000.
- LED 6000.
- LED 9000.

Materials


- Body: steel fabrication powder coated white RAL9016.
- Diffusing panels: flame retardant opal polycarbonate – UV stabilised.
- End cap & body colour: standard white RAL9016, available in brushed satin aluminium.

Installation

- BESA fixing (with additional mounting bracket, please enquire) and rear cable entry. 3 way mains terminal block. 4 way terminal block for emergency versions.

Standards


- IP20.
- 'F' Mark.
- CE.
- BS EN 60598.
- Class I.

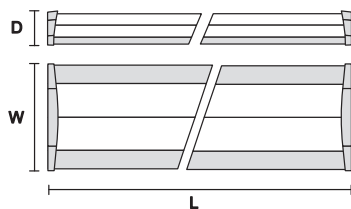


Size

Length	1258mm
Width	227.5mm
Depth	76.4mm


CD12/WL4LED3000



CD12/WL4LED6000



CD12/WL4LED9000



Code	Colour	Diffuser	Colour Temp.	System Power	Delivered Lumens	Efficacy
CD12/WL4LED3000	White	Premium Opal	4000 K	28.7 W	2970 lm	103 lm/W
CD12/WL4LED6000	White	Premium Opal	4000 K	51.5 W	5341 lm	103 lm/W
CD12/WL4LED9000	White	Premium Opal	4000 K	100.6 W	9964 lm	99 lm/W

Code options (add suffix to code)



3 Hour Maintained Emergency
M (300 lm)
Excludes - CD12/WL4LED9000



e-Motion™ Microwave Master Dim
-CFP



DALI / DSI Dim
-DDD



Self-Test Emergency
Prefix **CD12ST/** Suffix **M**



Switch Dim
-DD



e-Motion™ Microwave Slave Dim
-CFS



Wireless Control
-BT