

# Corrido™ LED 1500

Designed, Developed &  
Manufactured in the UK



## Colour Finish



White  
CD15/**W**



Satin Aluminium\*  
CD15/**F**

\*Minimum order quantity applies.

## LED Types

- LED 3000.
- LED 4500.
- LED 6000.
- LED 7500.

## Materials


- Body: steel fabrication powder coated white RAL9016.
- Diffusing panels: flame retardant opal polycarbonate – UV stabilised.
- End cap & body colour: standard white RAL9016, available in brushed satin aluminium.

## Installation

- BESA fixing (with additional mounting bracket, please enquire) and rear cable entry: 3 way mains terminal block. 4 way terminal block for emergency versions.

## Standards


- IP20.
- 'F' Mark.
- CE.
- BS EN 60598.
- Class I.

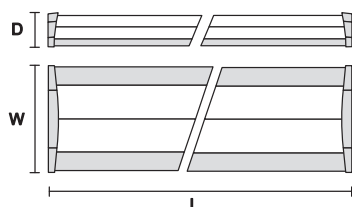


## Size

|        |         |
|--------|---------|
| Length | 1558mm  |
| Width  | 227.5mm |
| Depth  | 76.4mm  |


CD15/WL4LED3000




CD15/WL4LED4500



CD15/WL4LED6000



CD15/WL4LED7500



| Code            | Colour | Diffuser     | Colour Temp. | System Power | Delivered Lumens | Efficacy |
|-----------------|--------|--------------|--------------|--------------|------------------|----------|
| CD15/WL4LED3000 | White  | Premium Opal | 4000 K       | 25.2 W       | 2870 lm          | 113 lm/W |
| CD15/WL4LED4500 | White  | Premium Opal | 4000 K       | 34.3 W       | 4199 lm          | 122 lm/W |
| CD15/WL4LED6000 | White  | Premium Opal | 4000 K       | 44.6 W       | 5133.8 lm        | 115 lm/W |
| CD15/WL4LED7500 | White  | Premium Opal | 4000 K       | 63 W         | 6739 lm          | 106 lm/W |

**Code options** (add suffix to code)



3 Hour Maintained Emergency  
**M** (315 lm)



e-Motion™ Microwave Master Dim  
**-CFP**



DALI / DSI Dim  
**-DDD**



Self-Test Emergency  
Prefix **CD15ST**/ Suffix **M**



Microwave On/Off  
**-9**



e-Motion™ Microwave Slave Dim  
**-CFS**



Analogue Dim  
**-DA**