

Stealth Elite Flood Beam Angle

Designed, Developed & Manufactured in the UK



Colour Finish



Black
SEL/B



Titanium
SEL/X

LED Types

- LED 4 (350, 500mA).
- LED 8 (350, 500mA).

Materials


- Body: Die cast aluminium (powder coated).
- Diffuser: Vandal resistant polycarbonate.

Installation

- Wall mount.
- BESA fixing and rear cable entry. 3 way mains terminal block. 4 way terminal block for photocell versions.

Standards


- IP65.
- 20 Joules of impact resistance (IK10).
- 'F' Mark.
- CE.
- BS EN 60598.
- Class I.



Size

Width	330mm
Height	343mm
Depth	176mm

Flood Beam Angle

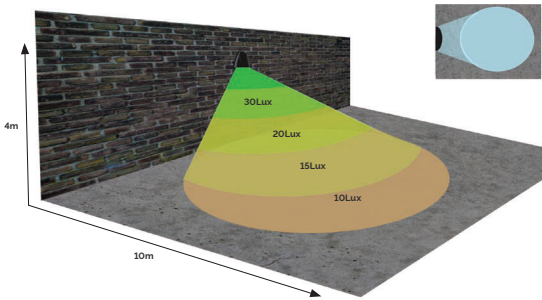

Code	Colour	Diffuser	Colour Temp.	System Power	Delivered Lumens	Efficacy
SEL/B4LED435-FL1	Black	Clear	4000 K	19 W	1915.5 lm	100.7 lm/W
SEL/B4LED450-FL1	Black	Clear	4000 K	26.4 W	2611.5 lm	98.5 lm/W
SEL/B4LED835-FL1	Black	Clear	4000 K	35.8 W	3717.8 lm	103.8 lm/W
SEL/B4LED850-FL1	Black	Clear	4000 K	49.9 W	5022 lm	100.6 lm/W

Code options (add suffix to code)



3 Hour Maintained Emergency
M (256 lm)



Photocell
C



PIR
P



Self-Test Emergency
Prefix SELST/ Suffix M