

Stealth Elite Wide Beam Angle

Designed, Developed & Manufactured in the UK



Colour Finish



Black
SEL/B



Titanium
SEL/X

LED Types

- LED 4 (350, 500mA).
- LED 8 (350, 500mA).

Materials


- Body: Die cast aluminium (powder coated).
- Diffuser: Vandal resistant polycarbonate.

Installation

- Wall mount.
- BESA fixing and rear cable entry. 3 way mains terminal block. 4 way terminal block for photocell versions.

Standards


- IP65.
- 20 Joules of impact resistance (IK10).
- 'F' Mark.
- CE.
- BS EN 60598.
- Class I.



Size

Width	330mm
Height	343mm
Depth	176mm

Wide Beam Angle

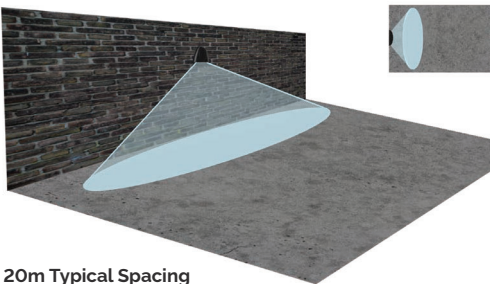

20m Typical Spacing

Based on a 5m mounting height.

Code	Colour	Diffuser	Colour Temp.	System Power	Delivered Lumens	Efficacy
SEL/B4LED435-W	Black	Clear	4000 K	19.4 W	1476 lm	76.1 lm/W
SEL/B4LED450-W	Black	Clear	4000 K	26.5 W	2006 lm	76.5 lm/W
SEL/B4LED835-W	Black	Clear	4000 K	35.6 W	3192 lm	89.5 lm/W
SEL/B4LED850-W	Black	Clear	4000 K	50 W	4325 lm	86.5 lm/W

Code options (add suffix to code)



3 Hour Maintained Emergency
M (256 lm)



Photocell
C



PIR
P



Self-Test Emergency
Prefix SELST/ Suffix M