

Clarity Portrait

Designed, Developed & Manufactured in the UK 



Colour Finish



Black
C2P/**B**



White
C2P/**W**



Titanium
C2P/**X**



Satin Aluminium
C2P/**F**

LED Types

- LED 600.

Materials

- Body: Landscape/portrait orientation in vandal resistant polycarbonate self-extinguishing fire properties in black / white / titanium.
- Fascia Ring: Vandal resistant polycarbonate with self-extinguishing fire properties.
- Diffuser: Vandal resistant polycarbonate opal with self-extinguishing fire properties.

Installation


- Wall or ceiling mount.
- BESA fixing and rear cable entry. 3 way mains terminal block. 4 way terminal block for high frequency photocell version.
- Auto level Feature.
- Hinged front fascia retained by single screw.
- Screw down diffuser.
- Photocell version - external use only.
- HI-LO PIR - 100% light output, dims to 10% during periods of inactivity.
- 2 x Conduit entry points.

Standards

- IP65.
- 'F' Mark.
- CE.
- BS EN 60598.
- Class I.

Size

| | |
|--------|-------|
| Width | 190mm |
| Height | 276mm |
| Depth | 125mm |

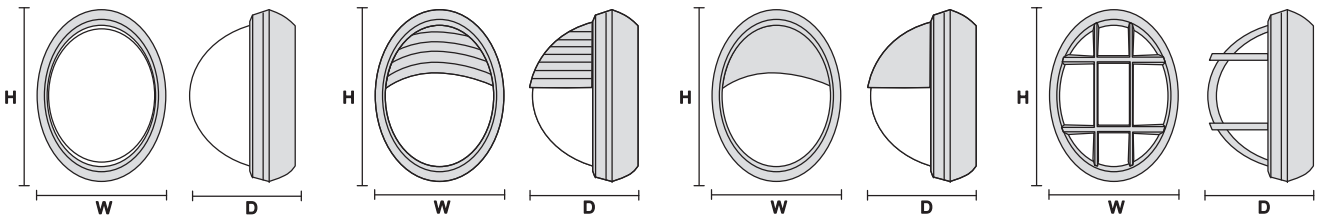

| Code | Colour | Diffuser | Colour Temp. | System Power | Delivered Lumens | Efficacy |
|----------------|--------|--------------|--------------|--------------|------------------|-----------|
| C2P/BLP4LED600 | Black | Premium Opal | 4000 K | 7.8 W | 517 lm | 66.3 lm/W |

Code options (add suffix to code)



Photocell
C



PIR
P



HI-LO PIR
HILO

Fascia Options
Eyelid - C2P/_**E**
Louvre - C2P/_**L**
Cage - C2P/_**C**