

Storm™ 1200

Designed, Developed & Manufactured in the UK 



Colour Finish



Grey
WP12/W

LED Types

- LED 3000.
- LED 4500.

Materials


- Body: Vandal resistant polycarbonate self-extinguishing fire properties in Grey.
- Diffuser: Vandal resistant polycarbonate in opal, with self-extinguishing fire properties.

Installation

- Ceiling mount.
- Multiple knockouts.
- Stainless steel toggle clips as standard.

Standards


- IP65.
- 20 Joules of impact resistance (IK10).
- 'F' Mark.
- CE.
- BS EN 60598.
- Class I.

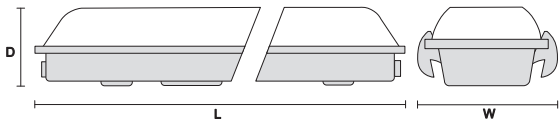


Size

Length	1215mm
Width	116mm
Depth	74mm
Clips	8

WP12/WL4LED3000



WP12/WL4LED4500



Code	Colour	Diffuser	Colour Temp.	System Power	Delivered Lumens	Efficacy
WP12/WL4LED3000	Grey	Premium Opal	4000 K	29 W	3029 lm	104 lm/W
WP12/WL4LED4500	Grey	Premium Opal	4000 K	39.5 W	4415 lm	111 lm/W

Code options (add suffix to code)



3 Hour Maintained Emergency
M (329 lm)



e-Motion™ Microwave Master Dim
-CFP



DALI / DSI Dim
-DDD



Analogue Dim
-DA



Microwave On/Off
-9



e-Motion™ Microwave Slave Dim
-CFS



Switch Dim
-DD



Self-Test Emergency
Prefix **WP12ST/** Suffix **M**