

Midi Square IP65

Designed, Developed & Manufactured in the UK 



Colour Finish



Black
Al/B



White
Al/W



Titanium
Al/X

LED Types

- LED 1800.

Material 1 (Polycarbonate)

- Body: Vandal resistant polycarbonate self-extinguishing fire properties in black / white / Titanium.
- Diffuser: Vandal resistant polycarbonate in opal, with self-extinguishing fire properties.

Material 2 (Die Cast Aluminium)


- Body: Die cast aluminium.
- Diffuser: Vandal resistant polycarbonate in opal, with self-extinguishing fire properties.

Installation

- Wall or ceiling mount.
- BESA fixing and rear cable entry.
- 3 way mains terminal block. 4 way terminal block for emergency & photocell versions.
- Screw down diffuser (with anti tamper screws on request).
- Photocell version - external use only.
- Microwave sensor option (internal use only).
- e-Motion™ Master (internal only) and Slave options available.

Standards


- IP65.
- 20 Joules of impact resistance (IK10).
- 'F' Mark.
- CE.
- BS EN 60598.
- Class I.

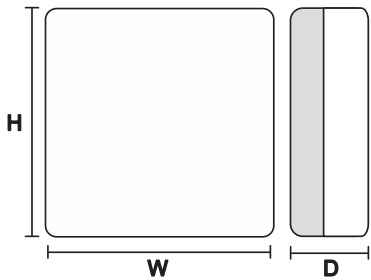

Size

Width	260mm
Height	260mm
Depth	90mm

Al/BL4LED1800



Code	Colour	Diffuser	Colour Temp.	System Power	Delivered Lumens	Efficacy
Al/BL4LED1800	Black	Premium Opal	4000 K	16.7 W	1646 lm	98 lm/W

Code options (add suffix to code)



3 Hour Maintained Emergency
M (107 lm)



DALI / DSI Dim
-DDD



Anti-Tamper Screws
T



Analogue Dim
-DA



Microwave On/Off
-9



Switch Dim
-DD



Photocell
C



Metal Base Option
AlM/_



Self-Test Emergency
Prefix AIST/ Suffix M