

Maxi Square IP65

Designed, Developed &
Manufactured in the UK



Colour Finish



Black
MS/**B**



White
MS/**W**



Titanium
MS/**X**

LED Types

- LED 3000.

Materials


- Body: Vandal resistant polycarbonate self-extinguishing fire properties in black / white / Titanium.
- Diffuser: Vandal resistant polycarbonate in opal, with self-extinguishing fire properties.

Installation

- Wall or ceiling mount.
- BESA fixing and rear cable entry.
- 3 way mains terminal block. 4 way terminal block for emergency & photocell versions.
- Screw down diffuser (with anti tamper screws on request).
- Photocell version - external use only.
- Microwave sensor option (internal use only).
- e-Motion™ Master (internal only) and Slave options available.

Standards


- IP65.
- 20 Joules of impact resistance (IK10).
- 'F' Mark.
- CE.
- BS EN 60598.
- Class I.

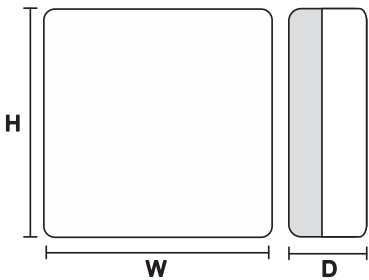

Size

Width	340mm
Height	340mm
Depth	104mm

MS/BL4LED3000



Code	Colour	Diffuser	Colour Temp.	System Power	Delivered Lumens	Efficacy
MS/BL4LED3000	White	Premium Opal	4000 K	25.7 W	2513 lm	98 lm/W

Code options (add suffix to code)

 3 Hour Maintained Emergency
M (275 lm)

 DALI / DSI Dim
-DDD

 Anti-Tamper Screws
T

 Analogue Dim
-DA

 Microwave On/Off
-9

 Switch Dim
-DD

 Photocell
C

 Self-Test Emergency
Prefix **MSST/** Suffix **M**

* MS/BL4LED3000 Emergency option available at a reduced output.