



Colour Finish



White
SM/**W**



Black
SM/**B**

LED Types

- LED 1800.

Materials


- Body: Die cast aluminium + fabricated steel in black or white.
- Diffuser: Vandal resistant polycarbonate in opal with self-extinguishing fire properties.

Installation

- Cornice mount.
- BESA fixing and rear cable entry.
- 3 way mains terminal block. 4 way terminal block for Emergency & photocell versions.
- Screw down lid.
- Photocell version - external use only.

Standards


- IP65.
- 20 Joules of impact resistance (IK10).
- 'F' Mark.
- CE.
- BS EN 60598.
- Class I.

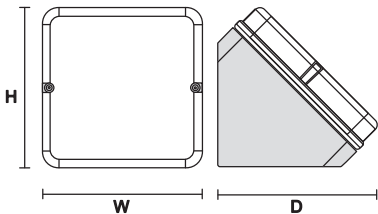

Size

Width	260mm
Height	260mm
Depth	212mm

SM/WL4LED1800



Code	Colour	Diffuser	Colour Temp.	System Power	Delivered Lumens	Efficacy
SM/WL4LED1800	White	Premium Opal	4000 K	16.7 W	1646 lm	98 lm/W

Code options (add suffix to code)

 3 Hour Maintained Emergency M (103 lm)	 e-Motion™ Microwave Master Dim -CFP	 Photocell C	 Anti-Tamper Screws T
 Microwave On/Off -9	 e-Motion™ Microwave Slave Dim -CFS	 Self-Test Emergency Prefix SMST / Suffix M	