

Emergency Slim 8 LED

Designed, Developed & Manufactured in the UK



Colour Finish



White
SL/W

LED Types

- 12 x LED - Standard Output 1W strip.

Materials


- Body: Vandal resistant polycarbonate self-extinguishing fire properties in white.
- Diffuser: Vandal resistant polycarbonate in prismatic, with self-extinguishing fire properties.

Installation

- Wall or ceiling mount.
- Multi 20mm knockouts.
- Screw down lid.
- Photocell options (external use only).
- Select by switch for Maintained or Non-Maintained operation.

Standards

- IP55.
- 'F' Mark.
- CE.
- BS EN 60598.
- Class I.

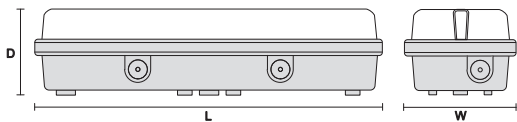

Size	
Length	368mm
Width	118mm
Depth	89mm

Code	LED	Colour	Diffuser	IP Rating
SL/WPLED12M	Standard Output + 3 Hour Maintained	White	Prismatic	IP55
SL/WPLED6M	High Output + 3 Hour Maintained	White	Prismatic	IP55
LBLB086	Running Man Exit Legend	IP55

Select by switch for Maintained or Non-Maintained operation.

Code options (add suffix to code)



3 Hour Maintained Emergency
M



3 Hour Non Maintained Emergency
N



Photocell
C