

Emergency SafeRoute™

Designed, Developed &
Manufactured in the UK



Colour Finish



White
SR_**W**

LED Types

- 12 LED strip 1W.

Materials


- Body: Mild steel in white – RAL9016.
- Acrylic legend – clear panel with screen print legend detail.
- Battery: Sealed nickel cadmium type.

Installation

- Surface, wall or recessed mount.
- Rear cable entry.
- 4 way terminal block.
- 220-240v 50/60Hz.
- Mains power consumption maintained mode 4W 30mA.
- Batteries 3 cell Ni-Mh 2.0Ah.
- Recharge period 12 hours.
- Main body retained into ceiling by two suspension springs which allow a rigid fix without need for additional tools.
- Whole unit installed into ceiling as one piece - no need for separate trims etc.
- Surface (ceiling) or wall mount.
- Recess ceilings between 5 - 25mm.

Standards

- IP20.
- 'F' Mark.
- CE.
- BS EN 60598.
- Class 1.

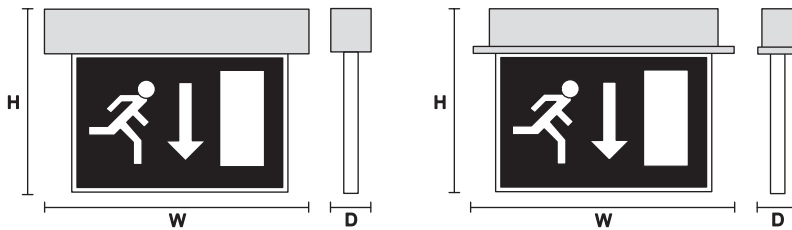

Size	Surface Mount	Recessed Mount	Wall Mount
Width	295mm	295mm	295mm
Height	201mm	207mm	209mm
Depth	54mm	50mm	56mm

Code	Mounting	Colour	Diffuser	IP Rating
SRS/WLED12DM	Surface Mount Down	White	Clear	IP20
SRS/WLED12LRM	Surface Mount Left / Right	White	Clear	IP20
SRS/WLED12UPM	Surface Mount Up	White	Clear	IP20
SRR/WLED12DM	Recessed Mount Down	White	Clear	IP20
SRR/WLED12LRM	Recessed Mount Left / Right	White	Clear	IP20
SRR/WLED12UPM	Recessed Mount Up	White	Clear	IP20
SRW/WLED12DM	Wall Mount Down	White	Clear	IP20
SRW/WLED12LRM	Wall Mount Left / Right	White	Clear	IP20
SRW/WLED12UPM	Wall Mount Up	White	Clear	IP20

Code options (add suffix to code)



3 Hour Maintained Emergency
M



3 Hour Non Maintained Emergency
N



DALI / DSI Dim
-DDD



Self-Test Emergency
Prefix **SR_ST** / Suffix **M**