

Profile Anti-Ligature 590mm

Designed, Developed &
Manufactured in the UK



Colour Finish



White
HP6AL/**W**



Satin Aluminium
HP6AL/**F**

LED Types

- LED 3000.
- LED 4000.

Materials


- Body: Steel in white / satin aluminium.
- Diffuser: Vandal resistant polycarbonate in opal or prismatic, with self-extinguishing fire properties.
- Tamper proof fixings.

Installation

- Wall or ceiling mount.
- For use with anti-pick mastic.

Standards


- IP20 (IP44 available as an option).
- 150 Joules of impact resistance (IK16).
- 'F' Mark.
- CE.
- BS EN 60598.
- Class I.

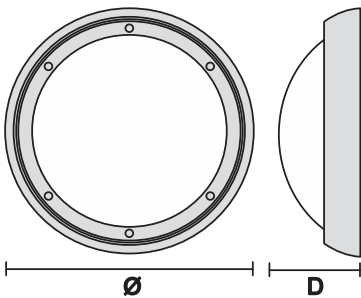


Size

Diameter	590mm
Depth	112mm

HP6AL/WL4LED3000



HP6AL/WL4LED4000



Code	Colour	Diffuser	Colour Temp.	System Power	Delivered Lumens	Efficacy
HP6AL/WL4LED3000	White	Premium Opal	4000 K	21.6 W	2351 lm	109 lm/W
HP6AL/WL4LED4000	White	Premium Opal	4000 K	32.7 W	3395 lm	104 lm/W

Code options (add suffix to code)



3 Hour Maintained Emergency
M (280 - 295 lm)



e-Motion™ Microwave Master Dim
-CFP



DALI / DSI Dim
-DDD



Analogue Dim
-DA



Microwave On/Off
-9



e-Motion™ Microwave Slave Dim
-CFS



Switch Dim
-DD



Self-Test Emergency
Prefix **HP6ALST/** Suffix **M**



Night Light
-CLED3



IP44
-B1