

ZIP Anti-Ligature

Designed, Developed &
Manufactured in the UK



Colour Finish



White
ZIPMAL/**W**

LED Types

- LED 1000.
- LED 2000.
- LED 3000.

Materials


- Body: Steel and Polycarbonate. Aluminium Reflector with Anti Ligature cover.
- Mild steel front cover.

Installation

- Recessed mounted down light, with ZIP adjustable fixing clip suitable for ceiling systems.
- 'Quick click' connector block.
- For use with anti-pick mastic.

Standards


- IP65.
- 20 Joules of impact resistance (IK10).
- 'F' Mark.
- CE.
- BS EN 60598.
- Class I.

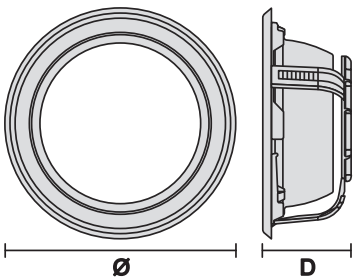


Size

Diameter	275mm
Depth	93mm
Ø210mm cut out	


ZIPMAL/WL4LED1000



ZIPMAL/WL4LED2000



ZIPMAL/WL4LED3000



Code	Colour	Diffuser	Colour Temp.	System Power	Delivered Lumens	Efficacy
ZIPMAL/WL4LED1000	White	Premium Opal	4000 K	16.3 W	1363 lm	83.6 lm/W
ZIPMAL/WL4LED2000	White	Premium Opal	4000 K	21.3 W	1812 lm	85 lm/W
ZIPMAL/WL4LED3000	White	Premium Opal	4000 K	28.7 W	2489 lm	86.7 lm/W

Code options (add suffix to code)



3 Hour Maintained Emergency
M (240lm)



e-Motion™ Microwave Master Dim
-CFP



DALI / DSI Dim
-DDD



Analogue Dim
-DA



TPA Rated
ZIPMAL/WL**TPA**4LED_



e-Motion™ Microwave Slave Dim
-CFS



Switch Dim
-DD



Self-Test Emergency
Prefix **ZIPALST/** Suffix **M**