

Invincible LED 1200

Designed, Developed &
Manufactured in the UK



Colour Finish



White
IV12/**W**

LED Types

- LED 3000.
- LED 6000.
- LED 7500.

Materials


- Body: Steel.
- Diffuser: Polycarbonate.

Installation

- Cornice mount.
- Microwave sensor option.
- e-Motion™ Corridor option.

Standards


- IP20 + IP66.
- 150 Joules of impact resistance (IK16).
- 'F' Mark.
- CE.
- BS EN 60598.

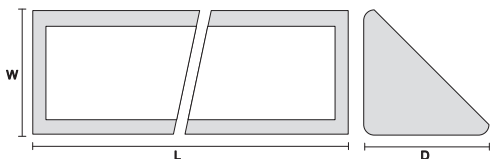


Size

Length	1273mm
Width	158mm
Depth	158mm

IV12/WK4LED3000



IV12/WK4LED7500



Code	Colour	Diffuser	Colour Temp.	System Power	Delivered Lumens	Efficacy
IV12/WK4LED3000	White	Prismatic	4000 K	33.7 W	2876 lm	85 lm/W
IV12/WK4LED6000	White	Prismatic	4000 K	57.6 W	5689 lm	98 lm/W
IV12/WK4LED7500	White	Prismatic	4000 K	74.2 W	6942 lm	93 lm/W

Code options (add suffix to code)



3 Hour Maintained Emergency
M



e-Motion™ Microwave Master Dim
-CFP



DALI / DSI Dim
-DDD



Analogue Dim
-DA



Microwave On/Off
-9



e-Motion™ Microwave Slave Dim
-CFS



Switch Dim
-DD



Self-Test Emergency
Prefix **IV12ST/** Suffix **M**



Night Light
-CLEDD3



IP66
IV12S/_