


Ashley Panel 30W | Dimmable

600x600mm 3780lm

New

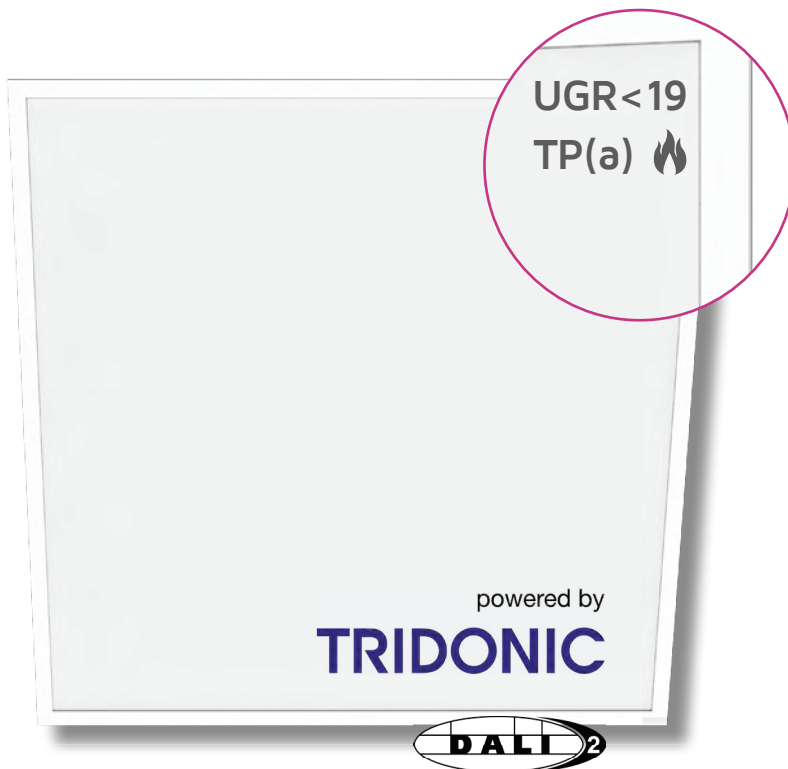

Features

- Tridonic one4all Dimming - DALI 1 & 2, DSI and switchDIM (Push)
- Low glare diffuser with UGR rating <19
- TP(a) flammability-rated diffuser
- Selectable 3000K, 4000K or 6000K colour temperature
- Flicker-free driver
- Backlit for a uniform light distribution





Compatible Accessories

Suspension Kit

NET-43-16-04

Page 217



All units are in mm

KEY DATA

Power	30W
Luminous Flux	3560lm/3780lm/3700lm
Colour Temperature	3000K/4000K/6000K
IP Rating	IP20
Dimensions	595 x 595 x 32mm
Warranty	5 Years (Registration Required)

Part Number DIM

NET-43-03-22

Part Number DIM EM

NET-43-03-23

TECHNICAL SPECIFICATIONS

Input Voltage AC	220-240V
Power Factor	>0.9
Luminaire Efficacy	119-130 lm/W
LED Manufacturer	Honglitrionic
LED Type	SMD2835
No. of LEDs	42
Driver Manufacturer	Tridonic Premium Series
Driver Output Voltage DC	30-42V
Total Circuit Power (W)	30W
Electrical Class	2
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	Yes
Flicker Free	Yes
Operating Temp.	0°C to +45°C
Lifespan _{LM80}	50,000 Hours
Diffuser Flammability Rating	TP(a)
UGR Rating	Less than 19
Housing Material	Aluminium
Weight	1.56Kg
Manufacturer	Sochii Lighting

EMERGENCY SPECIFICATIONS

IP Rating	IP20
Emergency Operation	>3H
Battery Pack	LiFePO4
Emergency Kit	3 Year Warranty
Operating Temp.	0°C to +45°C
Luminous Flux Factor	10%

Typically Replaces

- 4 x 18W T8 fluorescents
- 4 x 14W T5 fluorescents