

Ashley Panel 36W
600x600mm 3300lm

New



Features

- TP(b) flammability-rated diffuser
- Single colour temperature 4000K
- Flicker-free driver
- Backlit for a uniform light distribution



TP(b)

4K



Flicker Free


3H

Compatible Accessories

Suspension Kit

NET-43-16-04

Page 217

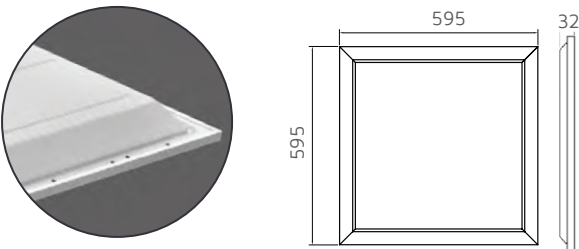

All units are in mm

KEY DATA

Power	36W
Luminous Flux	3300lm
Colour Temperature	4000K
IP Rating	IP20
Dimensions	595 x 595 x 32mm
Warranty	5 Years (Registration Required)

Part Number STD

NET-43-03-40

Part Number EM

NET-43-03-41

TECHNICAL SPECIFICATIONS

Input Voltage AC	220-240V
Power Factor	>0.9
Luminaire Efficacy	119-130 lm/W
LED Manufacturer	Honglitronic
LED Type	SMD2835
No. of LEDs	42
Driver Manufacturer	Sochii Lighting
Driver Output Voltage DC	30-42V
Total Circuit Power (W)	36W
Electrical Class	2
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	No
Flicker Free	Yes
Operating Temp.	0°C to +45°C
Lifespan _{LM80}	50,000 Hours
Diffuser Flammability Rating	TP(b)
UGR Rating	More than 19
Housing Material	Aluminium
Weight	1.56Kg
Manufacturer	Sochii Lighting

EMERGENCY SPECIFICATIONS

IP Rating	IP20
Emergency Operation	>3H
Battery Pack	LiFePO4
Emergency Kit	3 Year Warranty
Operating Temp.	0°C to +45°C
Luminous Flux Factor	8.3%

Typically Replaces

- 4 x 18W T8 fluorescents
- 4 x 14W T5 fluorescents