


Caxton Downlight 7W

4" 750lm

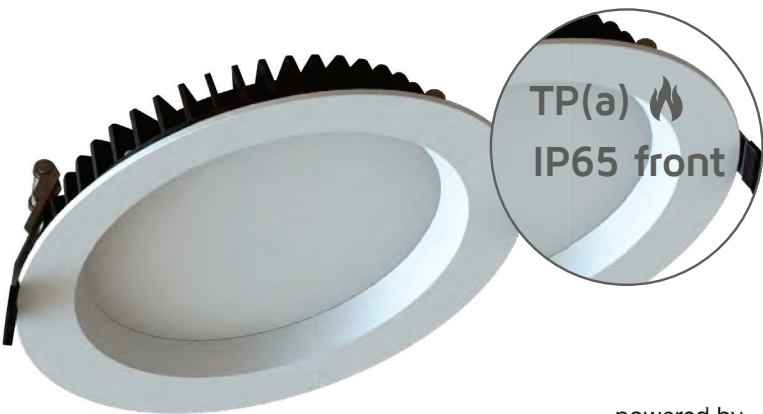

powered by
TRIDONIC

Features

- TP(a) flammability-rated diffuser
- Selectable 3000K, 4000K or 5500K colour temperature via switch
- Shatterproof polycarbonate diffuser
- Stainless steel retaining clips
- High lumens per watt
- IP65 rated fascia - protected against dust and water



Compatible Accessories

Microwave Sensor Recessed


NET-42-43-04

Page 201

10W Dimmable Driver

NET-42-43-26

Page 214



All units are in mm

KEY DATA

Power	7W
Luminous Flux	700lm/750lm/700lm
Colour Temperature	3000K/4000K/5500K
IP Rating	IP65 Front/IP20 Rear
Dimensions	ø140 x 45mm
Cut-Out Size	ø120-130mm
Warranty	5 Years (Registration Required)

Part Number STD

NET-49-05-72

Part Number EM

NET-49-05-77

TECHNICAL SPECIFICATIONS

Input Voltage AC	220-240V
Power Factor	>0.5
Luminaire Efficacy	105lm/W
LED Manufacturer	Honglitronic
LED Type	SMD 2835
No. of LEDs	60
Driver Manufacturer	Tridonic Essence Series
Driver Output Voltage DC	23-40V
Total Circuit Power (W)	7W
Electrical Class	3
Colour Rendering	>80 CRI
Lamp Viewing Angle	110°
Dimmable	Optional Upgrade
Flicker Free	Yes
Operating Temp.	0°C to +45°C
Lifespan _{LM80}	50,000 Hours
Diffuser Flammability Rating	TP(a)
UGR Rating	More than 19
Housing Material	Aluminium
Housing Colour	White
Weight	0.37Kg
Manufacturer	CREP Optoelectronics

EMERGENCY SPECIFICATIONS

Emergency Operation	>3H
Battery Pack	LiFePO4
Emergency Kit	3 Year Warranty
Operating Temp.	0°C to +45°C
Luminous Flux Factor	43%

Typically Replaces

- 1 x 50W dichroic halogen