


# Caxton Downlight 20W | Dimmable

8" 2200lm

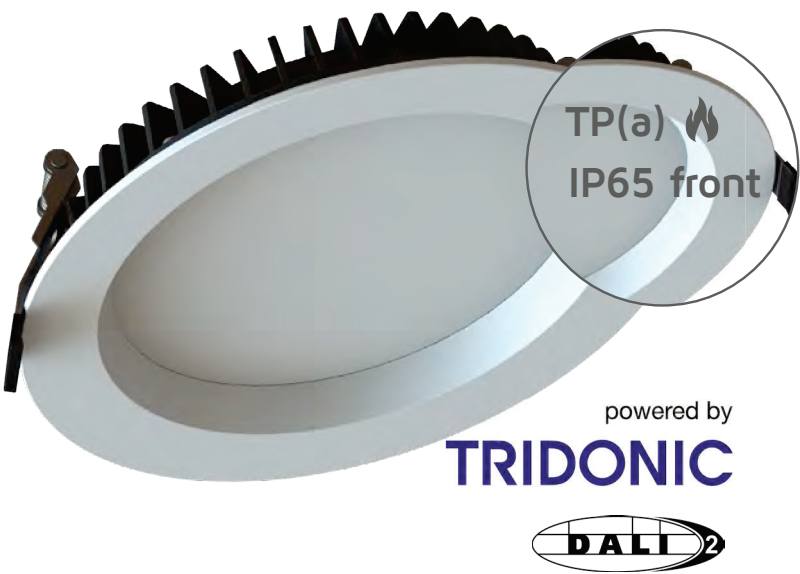

### Features

- Tridonic one4all Dimming – DALI 1 & 2, DSI and switchDIM (Push)
- TP(a) flammability-rated diffuser
- Selectable 3000K, 4000K or 5500K colour temperature via switch
- Shatterproof polycarbonate diffuser
- Stainless steel retaining clips
- High lumens per watt
- IP65 rated fascia – protected against dust and water



### Compatible Accessories

Microwave Sensor Recessed


NET-42-43-04

Page 201

DALI Dimmer Switch

NET-42-43-24

Page 209



All units are in mm

### KEY DATA

Power	20W
Luminous Flux	2100lm/2200lm/2100lm
Colour Temperature	3000K/4000K/5500K
IP Rating	IP65 Front/IP20 Rear
Dimensions	ø228 x 45mm
Cut-Out Size	ø200-210mm
Warranty	5 Years (Registration Required)

Part Number DIM

NET-49-05-88

Part Number DIM EM

NET-49-05-89

### TECHNICAL SPECIFICATIONS

Input Voltage AC	220-240V
Power Factor	>0.9
Luminaire Efficacy	105lm/W
LED Manufacturer	Honglitrionic
LED Type	SMD 2835
No. of LEDs	120
Driver Manufacturer	Tridonic Premium Series
Driver Output Voltage DC	30-44V
Total Circuit Power (W)	20W
Electrical Class	3
Colour Rendering	>80 CRI
Lamp Viewing Angle	110°
Dimmable	Yes
Flicker Free	Yes
Operating Temp.	0°C to +45°C
Lifespan <sub>LM80</sub>	50,000 Hours
Diffuser Flammability Rating	TP(a)
UGR Rating	More than 19
Housing Material	Aluminium
Housing Colour	White
Weight	0.87Kg
Manufacturer	CREP Optoelectronics

### EMERGENCY SPECIFICATIONS

Emergency Operation	>3H
Battery Pack	LiFePO4
Emergency Kit	3 Year Warranty
Operating Temp.	0°C to +45°C
Luminous Flux Factor	15%

### Typically Replaces

- 2 x 26W CFLs