

# Cambridge Surface Linear 38W/50W

1500mm (5ft) 4650lm/6500lm

New



powered by  
**TRIDONIC**


## Features

- Selectable 3000K, 4000K or 5500K colour temperature via switch
- Dual Wattage driver allows a choice between 38W or 50W at the time of installation
- Rear or end cable entry



## Compatible Accessories

Internal Daylight Switch	NET-42-43-10	Page 200
Internal On/Off Microwave Sensor	NET-42-43-02	Page 199

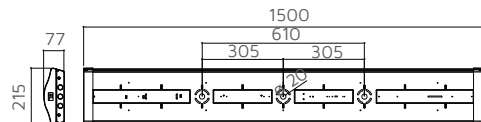

All units are in mm

## KEY DATA

Power	38W/50W
Luminous Flux	4650lm/6500lm
Colour Temperature	3000K/4000K/5500K
IP Rating	IP20
Dimensions	1500 x 215 x 77mm
Warranty	5 Years (Registration Required)

Part Number STD **NET-51-11-65**

Part Number EM **NET-51-11-67**

## TECHNICAL SPECIFICATIONS

Input Voltage AC	220-240V
Power Factor	>0.9
Luminaire Efficacy	130lm/W
LED Manufacturer	Honglitronic
LED Type	SMD 2835
No. of LEDs	720
Driver Manufacturer	Tridonic Advanced Series
Driver Output Voltage DC	60V
Total Circuit Power (W)	38W/50W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	No
Flicker Free	Yes
Operating Temp.	0°C to +40°C
Lifespan <sub>LM80</sub>	50,000 Hours
Fire Rating	V2
UGR Rating	More than 22
Diffuser Material	PC
Housing Material	Steel
Housing Colour	White
Weight	3.2Kg
Manufacturer	Sealite Co. Ltd.

## EMERGENCY SPECIFICATIONS

IP Rating	IP20
Emergency Operation	>3H
Battery Pack	LiFePO4
Emergency Pack	Streamer
Emergency Kit	3 Year Warranty
Operating Temp.	0°C to +40°C
Luminous Flux Factor	8%/6%

## Typically Replaces

- 2 x 58W T8 fluorescents
- 2 x 35W T5 fluorescents