

# Cambridge Surface Linear 50W | Dimmable

New

1500mm (5ft) 6500lm



## Features

- Tridonic one4all Dimming - DALI 1 & 2, DSI and switchDIM (Push)
- Selectable 3000K, 4000K or 5500K colour temperature via switch
- Rear or end cable entry



## Compatible Accessories

Internal Daylight Switch	NET-42-43-10	Page 200
Internal On/Off Microwave Sensor	NET-42-43-02	Page 199
DALI Dimmer Switch	NET-42-43-24	Page 209

## KEY DATA

Power	50W
Luminous Flux	6500lm
Colour Temperature	3000K/4000K/5500K
IP Rating	IP20
Dimensions	1500 x 215 x 77mm
Warranty	5 Years (Registration Required)

Part Number DIM **NET-51-11-70**

Part Number DIM EM **NET-51-11-72**

## TECHNICAL SPECIFICATIONS


Input Voltage AC	220-240V
Power Factor	>0.9
Luminaire Efficacy	130lm/W
LED Manufacturer	Honglitrionic
LED Type	SMD 2835
No. of LEDs	720
Driver Manufacturer	Tridonic Premium Series
Driver Output Voltage DC	60V
Total Circuit Power (W)	50W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	Yes
Flicker Free	Yes
Operating Temp.	0°C to +40°C
Lifespan <sub>L80</sub>	50,000 Hours
Fire Rating	V2
UGR Rating	More than 22
Diffuser Material	PC
Housing Material	Steel
Housing Colour	White
Weight	3.2Kg
Manufacturer	Sealite Co. Ltd.

## EMERGENCY SPECIFICATIONS

IP Rating	IP20
Emergency Operation	>3H
Battery Pack	LiFePO4
Emergency Pack	Streamer
Emergency Kit	3 Year Warranty
Operating Temp.	0°C to +40°C
Luminous Flux Factor	6%

## Typically Replaces

- 2 x 58W T8 fluorescents
- 2 x 35W T5 fluorescents

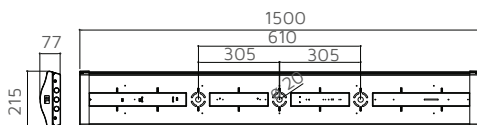

All units are in mm