

Histon Street Light 30W

4000lm



Features

- Slip-fitter included for use on 60 or 76mm pole
- Maintenance cover allows for fast and easy installation
- Slim and compact profile for minimum wind resistance
- Extremely energy efficient
- Standard 10KV surge protection
- Adjustable head by -15° to +15°




Compatible Accessories

3 Pin NEMA Photocell Sensor

NET-23-20-08

Page 169

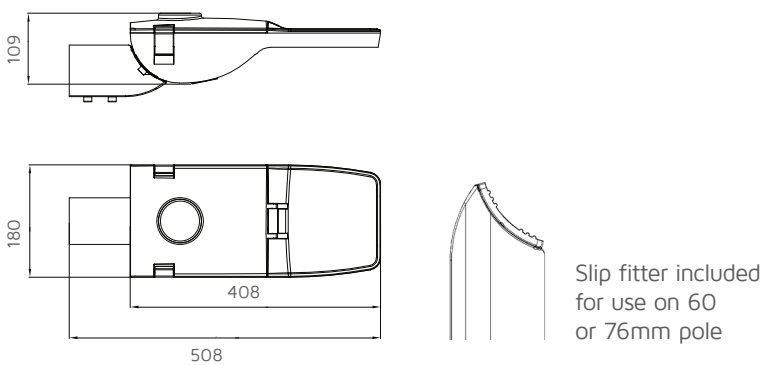

All units are in mm

KEY DATA

Power	30W
Luminous Flux	4000lm
Colour Temperature	4000K
IP Rating	IP65
IK Rating	IK08
Pole Size	ø60 or ø76mm
Dimensions	508 x 180 x 109mm
Warranty	5 Years (Registration Required)

Part Number

NET-23-20-03

TECHNICAL SPECIFICATIONS

Input Voltage AC	100-270V
Power Factor	>0.90
Luminaire Efficacy	130lm/W
LED Manufacturer	Philips
LED Type	EMC 3030
No. of LEDs	56
Driver Manufacturer	Tomcarline
Driver Output Voltage DC	42V
Total Circuit Power (W)	30W +/- 5W
Electrical Class	1
Colour Rendering	>70 CRI
Lamp Viewing Angle	140° x 70°
Dimmable	No
Photocell Compatible	Yes (NET-23-20-08)
Operating Temp.	-15°C to +40°C
Lifespan <small>LM80</small>	50,000 Hours
Diffuser Material	Glass
Housing Material	Aluminium
Housing Colour	Grey
Weight	5Kg
Manufacturer	FYTLED