



## APRILED/CCTPACK

Prism LED Fire Rated Downlight Pack 8W - Cool White/ Warm White/ Daylight



## Features

LED dimmable fire-rated downlight for domestic applications

Supplied with 3 bezels as standard:- matt white, chrome and satin chrome bezels

Integrated switch allows installer the choice of 3000K, 4000K or 6000K colour temperature options

Integral driver with terminals for ease and speed of installation

Fully tested for 30, 60 and 90 minute ceiling types to meet Part B of Building Regulations

Fully tested to meet Part C (moisture) and part E (acoustic) of Building Regulations

Wide 60° beam angle for increased light distribution

LED lifespan L70 40,000 hours

## General Information

Lamp Type	LED
Colour / Finish	Matt White/Chrome/Satin Chrome
Fire Rated	Yes
IP Rating	IP65
Class Protection	1
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
Warranty (Years)	5
CE Mark	Yes
Height / Depth	118
Length / Diameter	95


## Technical Information

Wattage	8W
Lumens Delivered	567lm(Cool White), 625lm(Warm White), 675lm(Daylight)
Lm/W	67Lm/W (Cool White), 75Lm/W (Warm White), 85Lm/W (Daylight)
Beam Angle	60
CRI	Ra 80
CCT	3000K/4000K/6000K
Input	230V
Hertz	50Hz
Operating Temp	-5°C to 30°C

## Technical Data - ETIM 6 - Downlight rigid/swivelling (EC001702)

Suitable for wall mounting	No
Suitable for suspended mounting	No
With light source	Yes
Material housing	Aluminium
Colour housing	White
Suitable for number of lamps	1
Voltage type	AC
Nominal voltage	230-230 V
Control gear included	Yes
Degree of protection (IP)	IP65
Protection class	I
Rated luminous flux acc. IEC 62722-2-1	675 lm
Colour of light	White
Colour temperature	3000-6000 K
Colour rendering index CRI	80-89
Outer diameter	95 mm
Built-in width	98 mm
Lamp power at multiwatt	Not applicable
Emergency unit integrated	No
Suitable for ceiling mounting	Yes
Suitable for built-in mounting	Yes
Suitable for surface mounting	No
Adjustability	Not adjustable
Suitable for lamp power	8-8 W
With light sensor	No

With movement sensor	No
Max. system power	8 W
Type of grid	None
Beam angle	Wide beam 41-80°
Height/depth	118 mm
Ambient temperature	-5-30 °C

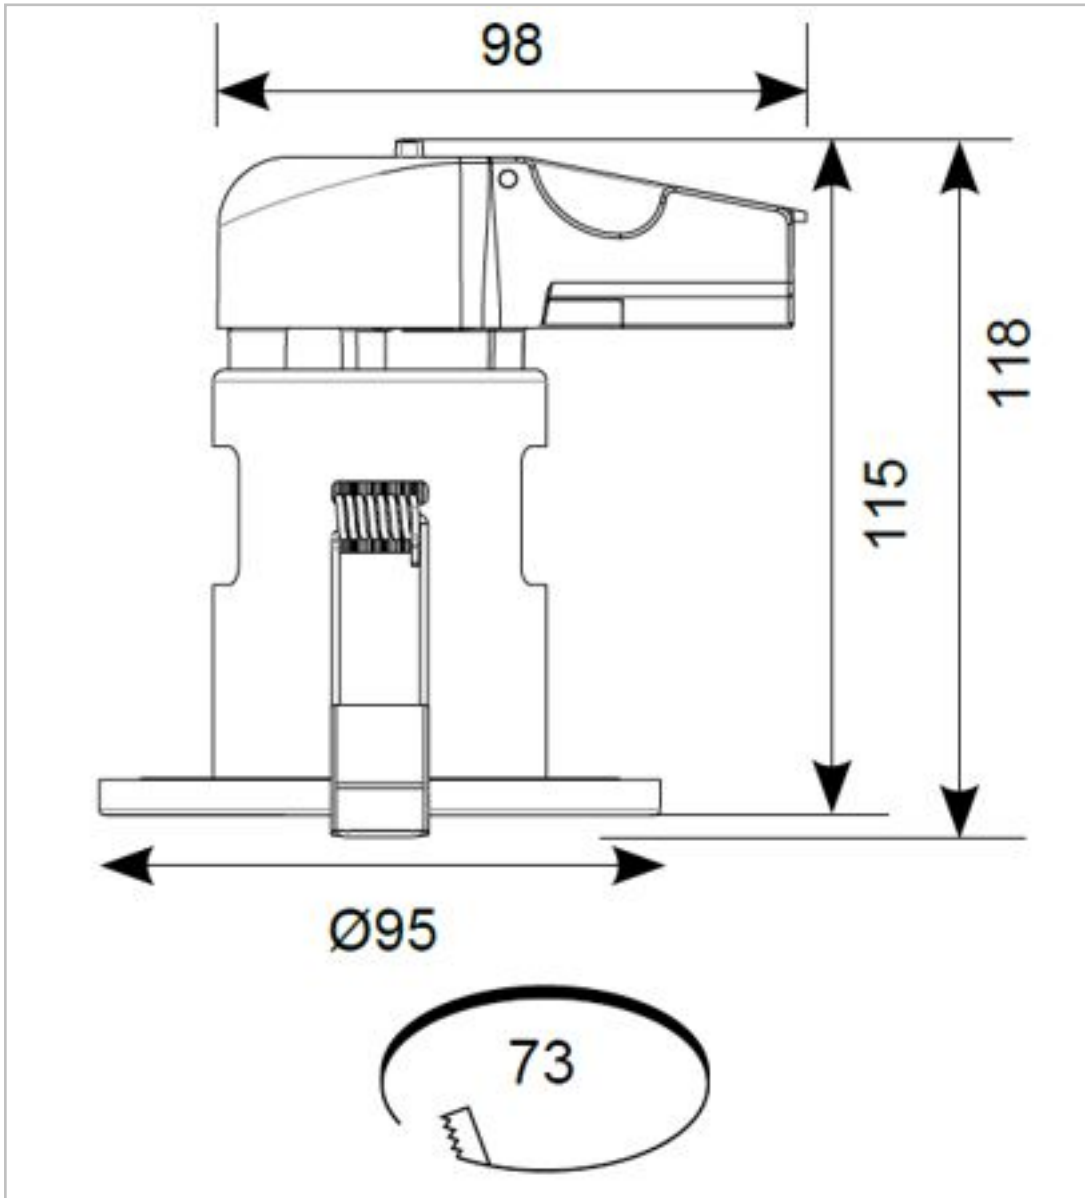

Datasheet generated from <http://www.electrika.com> last updated Monday, January 22, 2018 2:50:00 PM