



AULED1/SMP

Unity Square Retractable LED Downlight 15W - Cool White



Features

Recessed adjustable downlight

Retractable head design allows for a range of installation applications

Full 360° head rotation and 90° tilting capability

Exceeds performance of 50W AR111 lamp

Black trim provides excellent glare control

Steel housing with diecast aluminium body for excellent thermal management

Remote driver with plug and play connection

LED lifespan L70 50,000 hours

Non-dimmable

General Information

Lamp Type	LED
IP Rating	IP20
Class Protection	2
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
Warranty (Years)	5
CE Mark	Yes
Length (mm)	100
Width (mm)	100
Height (mm)	106

Technical Information


Wattage	15W
Lumens Delivered	736lm
Lm/W	49lm
Beam Angle	45
CRI	Ra 90
CCT	4000K
Input	230V
Hertz	50Hz/60Hz
Operating Temp	-20°C to 50°C

Technical Data - ETIM 6 - Downlight rigid/swivelling (EC001702)

Suitable for ceiling mounting	Yes
Suitable for built-in mounting	Yes
Adjustability	Rotating and swivelling
With light source	Yes
Suitable for number of lamps	1
Lamp power at multiwatt	Not applicable
Control gear included	Yes
Type of dimming	Not dimmable
Emergency unit integrated	No
With light sensor	No
With movement sensor	No
Nominal voltage	230-230 V
Max. system power	15 W
Colour temperature	4000-4000 K
Material housing	Steel
Colour housing	White
Type of grid	None
Beam angle	Wide beam 41-80°
Length	100 mm
Width	100 mm
Height/depth	106 mm
Protection class	II
Degree of protection (IP)	IP20
Ambient temperature	-20-50 °C
Rated luminous flux acc. IEC 62722-2-1	736 lm

Colour of light White

Colour rendering index CRI 90-100

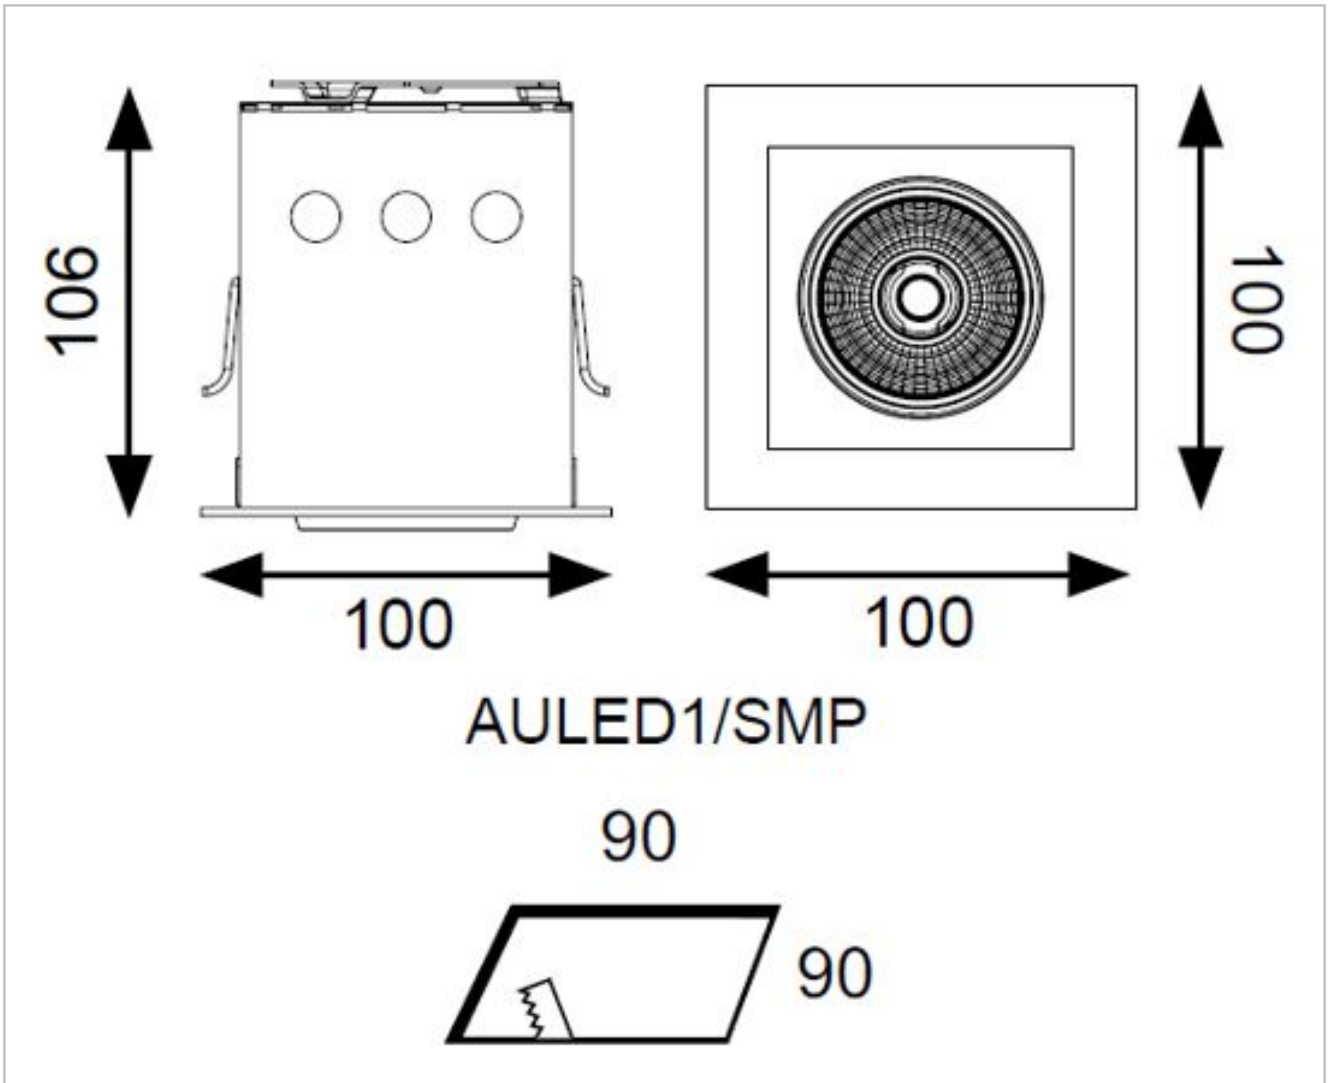

Datasheet generated from <https://www.electrika.com> last updated Monday, June 17, 2019 8:32:09 AM