ABROLED

Brooklyn LED Bi-Directional Panel 36W - Cool White

Features

High performance bi-directional suspendable LED panel

Integral LED driver provides a unique aesthetically pleasing design

White anodised aluminium frame

Supplied c/w 1.2m suspension kit as standard

LED lifespan L70 50,000 hours

1-10V dimmable as standard

General Information

Lamp Type	LED
Colour / Finish	White
IP Rating	IP20
Class Protection	1
Internal / External	Internal
Surface / Recessed / Suspended	Suspended
Warranty (Years)	2
CE Mark	Yes
Length (mm)	1195
Width (mm)	295
Height (mm)	22

Technical Information

Wattage	36W
Lumens Delivered	3788lm
Lm/W	105lm
CRI	Ra 80
CCT	4000K
Input	230V
Hertz	50/60Hz
Operating Temp	-20°C to 40°C

Technical Data - ETIM - Ceiling-/wall luminaire (EC002892)

Suitable for wall mounting	No
Suitable for suspended mounting	Yes
Suitable for ceiling mounting	Yes
Suitable for built-in mounting	No
Suitable for surface mounting	No
Material housing	Aluminium
Nominal voltage	230-230 V
Control gear included	Yes
Dimming 1-10 V	Yes
No dim function	No
Degree of protection (IP)	IP20
Protection class	I
Suitable for emergency lighting	No
With movement sensor	No
With light sensor	No
Max. system power	36 W
Rated luminous flux acc. IEC 62722-2-1	3788 lm
Colour of light	White
Colour temperature	4000-4000 K
Colour rendering index CRI	80-89
Luminaire efficacy	105 lm/W
Width	295 mm
Height/depth	22 mm
Length	1195 mm

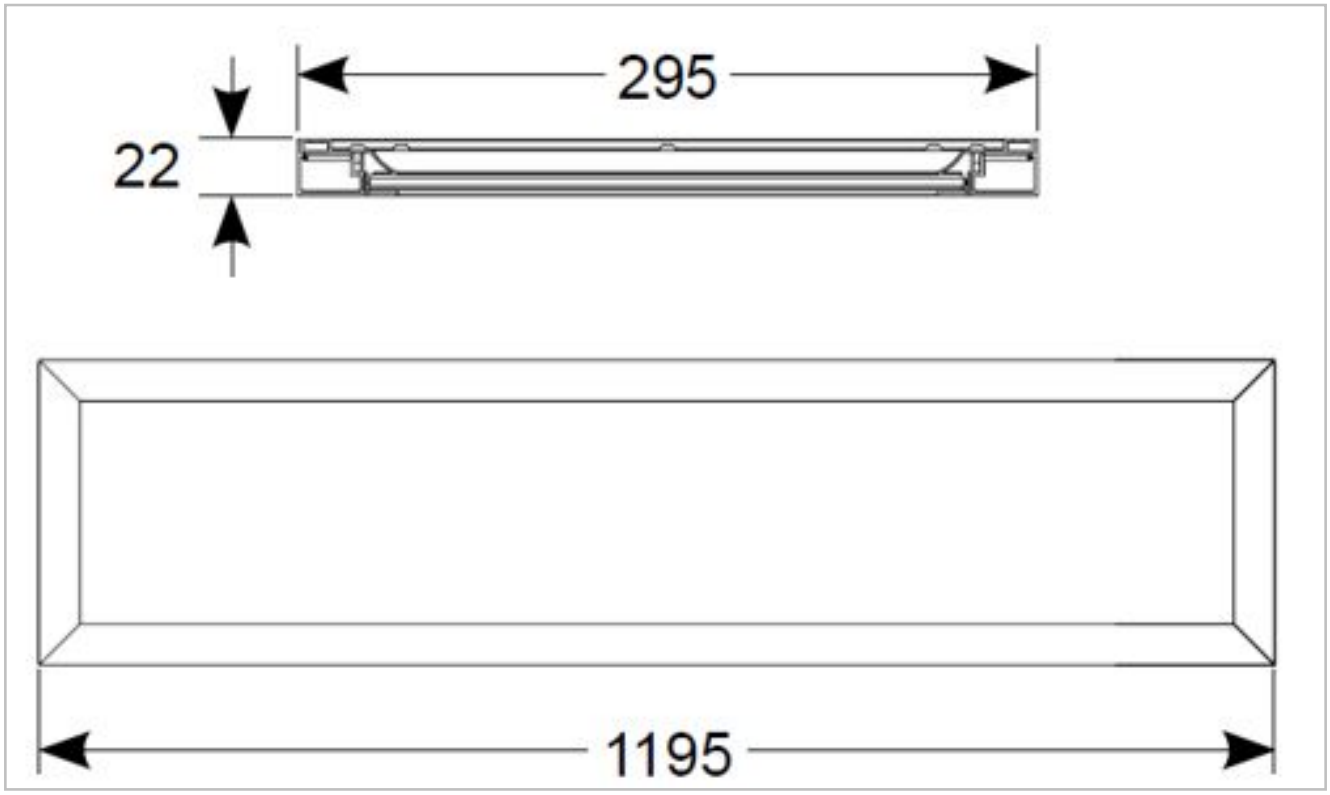

Datasheet generated from https://onetimepim.com last updated Monday, November 4, 2019 2:41:01 PM