ACALED10/WW

Calinor LED Polycarbonate Floodlight Warm White 10W Black

Features

Compact and economic polycarbonate LED floodlight.

Warm and Cool white options.

10W LED ideal for halogen replacement.

Polished faceted reflector and textured glass for optimum performance.

Pre-wired with 500mm of rubber insulated cable for ease of installation.

LED lifespan L70 20,000 hours.

Non-dimmable.

General Information

Lamp Type	LED
Colour / Finish	Black
IP Rating	IP65
IK Rating	IK07
Class Protection	2
Internal / External	Internal/External
Surface / Recessed / Suspended	Surface
Warranty (Years)	2
CE Mark	Yes
Width (mm)	119
Height (mm)	135
Depth (mm)	50

Technical Information

Wattage	10W
Lumens Delivered	892lm
Lm/W	89lm
CRI	Ra 80
CCT	3000K
Input	230V
Hertz	50Hz
Operating Temp	-15°C to 40°C

Technical Data - ETIM - Downlight/spot/floodlight (EC001744)

Suitable for surface mounting	Yes
Suitable for built-in mounting	No
Suitable for wall mounting	Yes
Suitable for suspended mounting	No
Suitable for ceiling mounting	No
Suitable for traverse mounting	No
Suitable for pedestal/floor mounting	No
Suitable for light-track mounting	No
Adjustability	Swivelling
With movement sensor	No
With light sensor	No
Material housing	Plastic
Control gear included	Yes
Degree of protection (IP)	IP65
Protection class	II
Max. system power	10 W
Colour of light	White
Colour temperature	3000-3000 K
Colour rendering index CRI	80-89
Rated luminous flux acc. IEC 62722-2-1	892 lm
Lamp efficacy	89 lm/W
Width	50 mm
Height/depth	135 mm
Length	119 mm

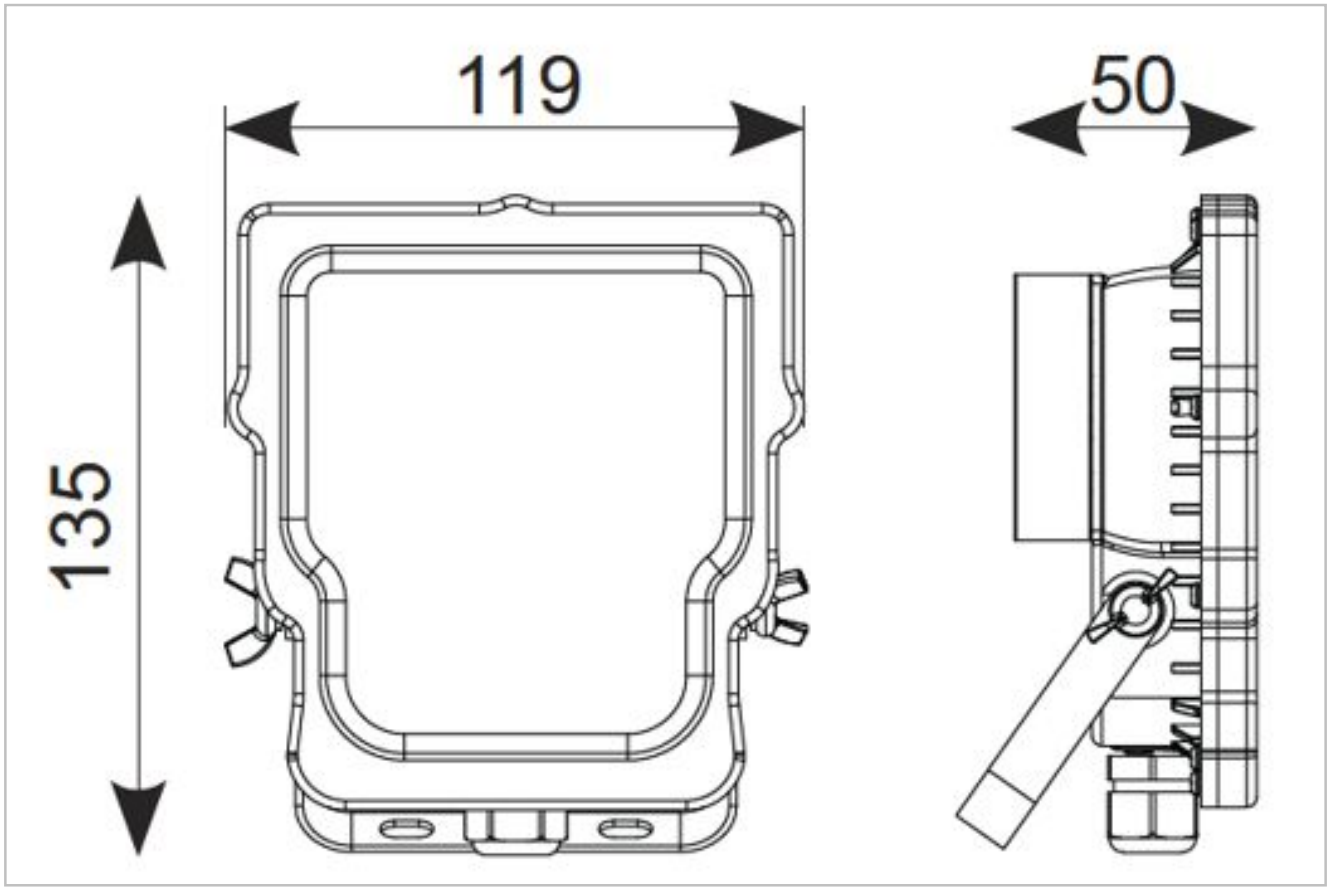

Datasheet generated from https://onetimepim.com last updated Monday, November 4, 2019 1:56:28 PM