# AHARLED/3M/ST

Harrier LED Maintained / Non-Maintained 5W White

## Features

Compact high performance IP65 polycarbonate surface emergency luminaire.

Self-test as standard.

Optional hanging blade legends (supplied with self-adhesive legend as standard) for enhanced appearance.

Aesthetically designed for modern appearance.

High output LED performance and distribution allows maximum spacing providing reduced cost.

Viewing distance 25 metres.

# General Information

| | |
|---|---|
| **Lamp Type** | LED |
| **Colour / Finish** | White |
| **Self Test** | Yes |
| **Minimum Recharge Period** | 24 hours |
| **IP Rating** | IP65 |
| **Class Protection** | 1 |
| **Internal / External** | Internal/External |
| **Surface / Recessed / Suspended** | Surface |
| **LED Life** | L70 50,000hrs |
| **Warranty (Years)** | 3 |
| **CE Mark** | Yes |
| **Length (mm)** | 336 |
| **Width (mm)** | 130 |
| **Height (mm)** | 51 |
| **Accessories** | AHARLED/L/ALAR, AHARLED/L/AD, AHARLED/L/AU, ASBP/5 |

# Technical Information

| | |
|---|---|
| **Wattage** | 5W |
| **Lumens Delivered** | 142lm (Emergency), 299lm (Standard) |
| **CCT** | 6500K |
| **Input** | 230V |
| **Hertz** | 50/60Hz |
| **Operating Temp** | 0C° to 40C° |

# Technical Data - ETIM - Emergency luminaire (EC001957)

| | |
|---|---|
| **Mounting method** | Ceiling surface mounting |
| **Function** | Escape route lighting/signage |
| **Monitoring equipment** | Automatic self test |
| **With light source** | Yes |
| **Material housing** | Plastic |
| **Colour housing** | White |
| **Nominal voltage** | 230-230 V |
| **Degree of protection (IP)** | IP65 |
| **Protection class** | I |
| **Max. system power** | 5 W |
| **Rated luminous flux acc. IEC 62722-2-1** | 299 lm |
| **Colour temperature** | 6500-6500 K |
| **Recognition distance** | 25 m |
| **Width** | 130 mm |
| **Length** | 336 mm |

Datasheet generated from https://onetimepim.com last updated Monday, November 4, 2019 1:58:36 PM

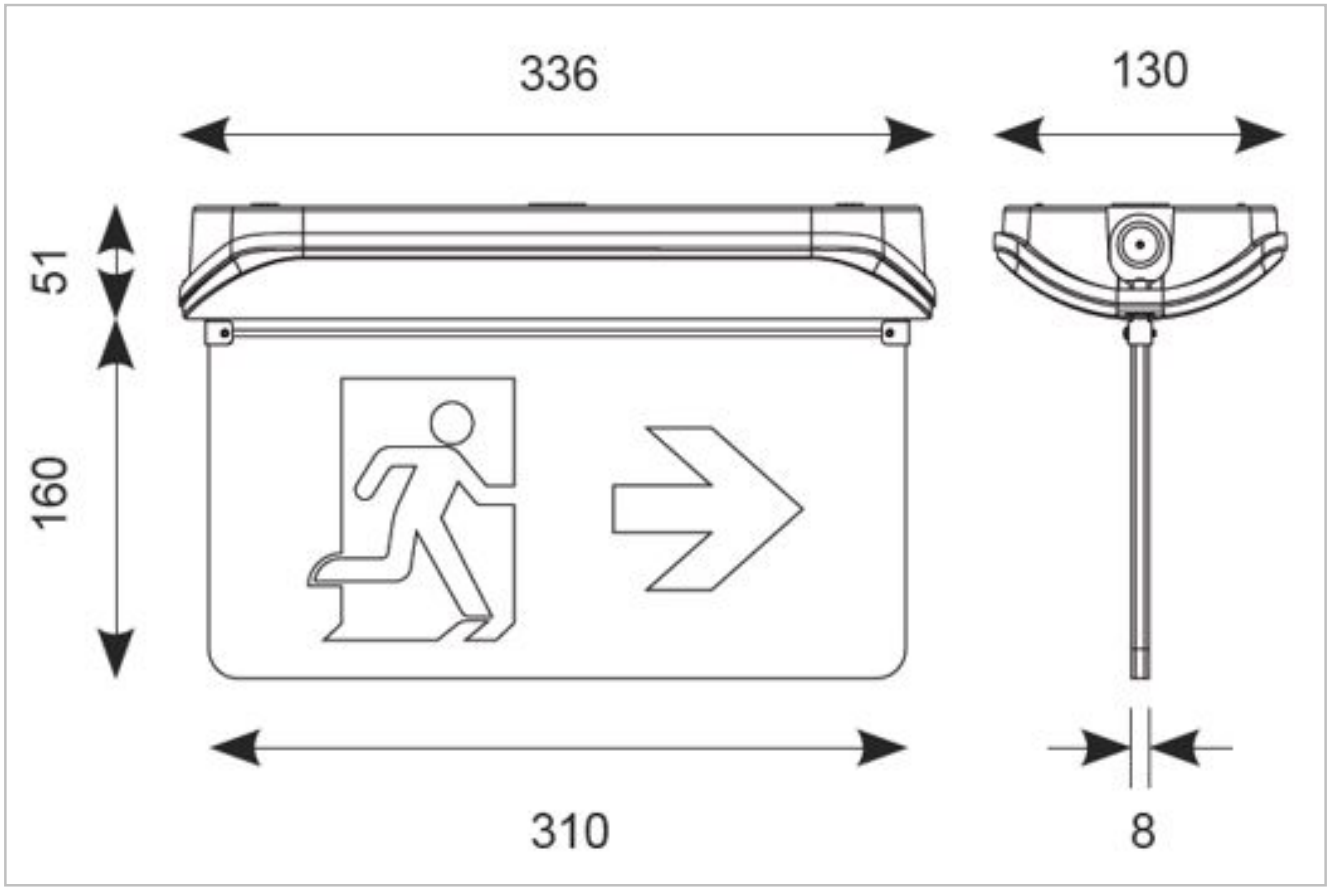
336
130
51
160
310
8