AIGLED/WW/W

Iris LED Warm White 3W White

Features

Micro recessed adjustable downlight with 40° tilt angle.

Multiple uses, including general downlighting, retail, cabinets and furniture applications.

LED lifespan L70 50,000 hours.

General Information

Lamp Type	LED
Colour / Finish	White
IP Rating	IP20
Class Protection	3
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
Warranty (Years)	3
CE Mark	Yes
Diameter (mm)	52
Height (mm)	16
Accessories	AD3W/700, ADK12W/700, ADK20W/700, AMCD25W, AMCD50W

Technical Information

Wattage	3W
Lumens Delivered	141lm
Lm/W	28lm
Beam Angle	19
CRI	Ra 80
CCT	3000K
Input	700mA
Hertz	50/60Hz
Operating Temp	-20°C to 25°C

Technical Data - ETIM - Downlight/spot/floodlight (EC001744)

Suitable for surface mounting	No
Suitable for built-in mounting	Yes
Suitable for wall mounting	No
Suitable for suspended mounting	No
Suitable for ceiling mounting	Yes
Suitable for traverse mounting	No
Suitable for pedestal/floor mounting	No
Suitable for light-track mounting	No
Adjustability	Swivelling
With movement sensor	No
With light sensor	No
With light source	Yes
Suitable for number of lamps	1
Colour housing	White
LED nominal current at constant current	700-700 mA
Control gear included	No
Beam angle	Narrow beam 11-20°
Degree of protection (IP)	IP20
Protection class	III
Max. system power	3 W
Colour of light	White
Colour temperature	3000-3000 K
Colour rendering index CRI	80-89
Rated luminous flux acc. IEC 62722-2-1	141 lm
Lamp efficacy	28 lm/W

Height/depth	16 mm
Outer diameter	52 mm

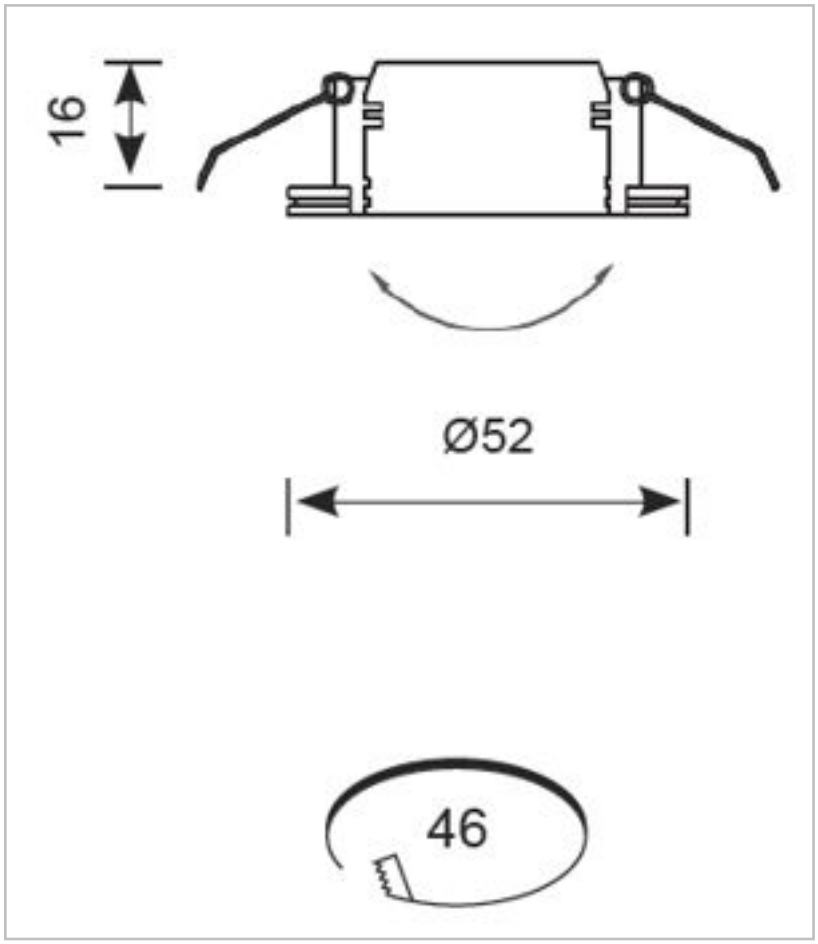

Datasheet generated from https://onetimepim.com last updated Tuesday, December 1, 2020 9:47:24 AM