



## AMLWPLED/CCT

Lynx Mini CCT Wallpack



## Features

Robust compact wall mounted luminaire for general accent illumination and suitable for education, commercial, industrial applications

All polycarbonate vandal resistant body with fresnel lens

Tamper-proof allen key screws supplied as standard

Multiple conduit entry and BESA box fixing points

Hinged front face allows for a quick and easy installation

Selectable CCT between 3000K and 4000K output

Photocell and sensor options


Powered by Tridonic

## General Information

Lamp Type	LED
Colour / Finish	Black
IP Rating	IP65
IK Rating	IK08
Class Protection	2
Internal / External	External
Surface / Recessed / Suspended	Surface
Lifetime (Hrs)	L70 B50 36,000h
Warranty (Years)	5
CE Mark	Yes
Width (mm)	150 mm
Height (mm)	271 mm
Depth (mm)	86 mm

## Technical Information

Wattage	15W
Lumens Delivered	1200lm (4000K)
Lm/W	78lm/W (4000K)
Beam Angle	25x75
CRI	80
CCT	3000/4000K
Input	220/240V
Hertz	50/60Hz
Operating Temp	-10°C to 40°C
SDCM	6

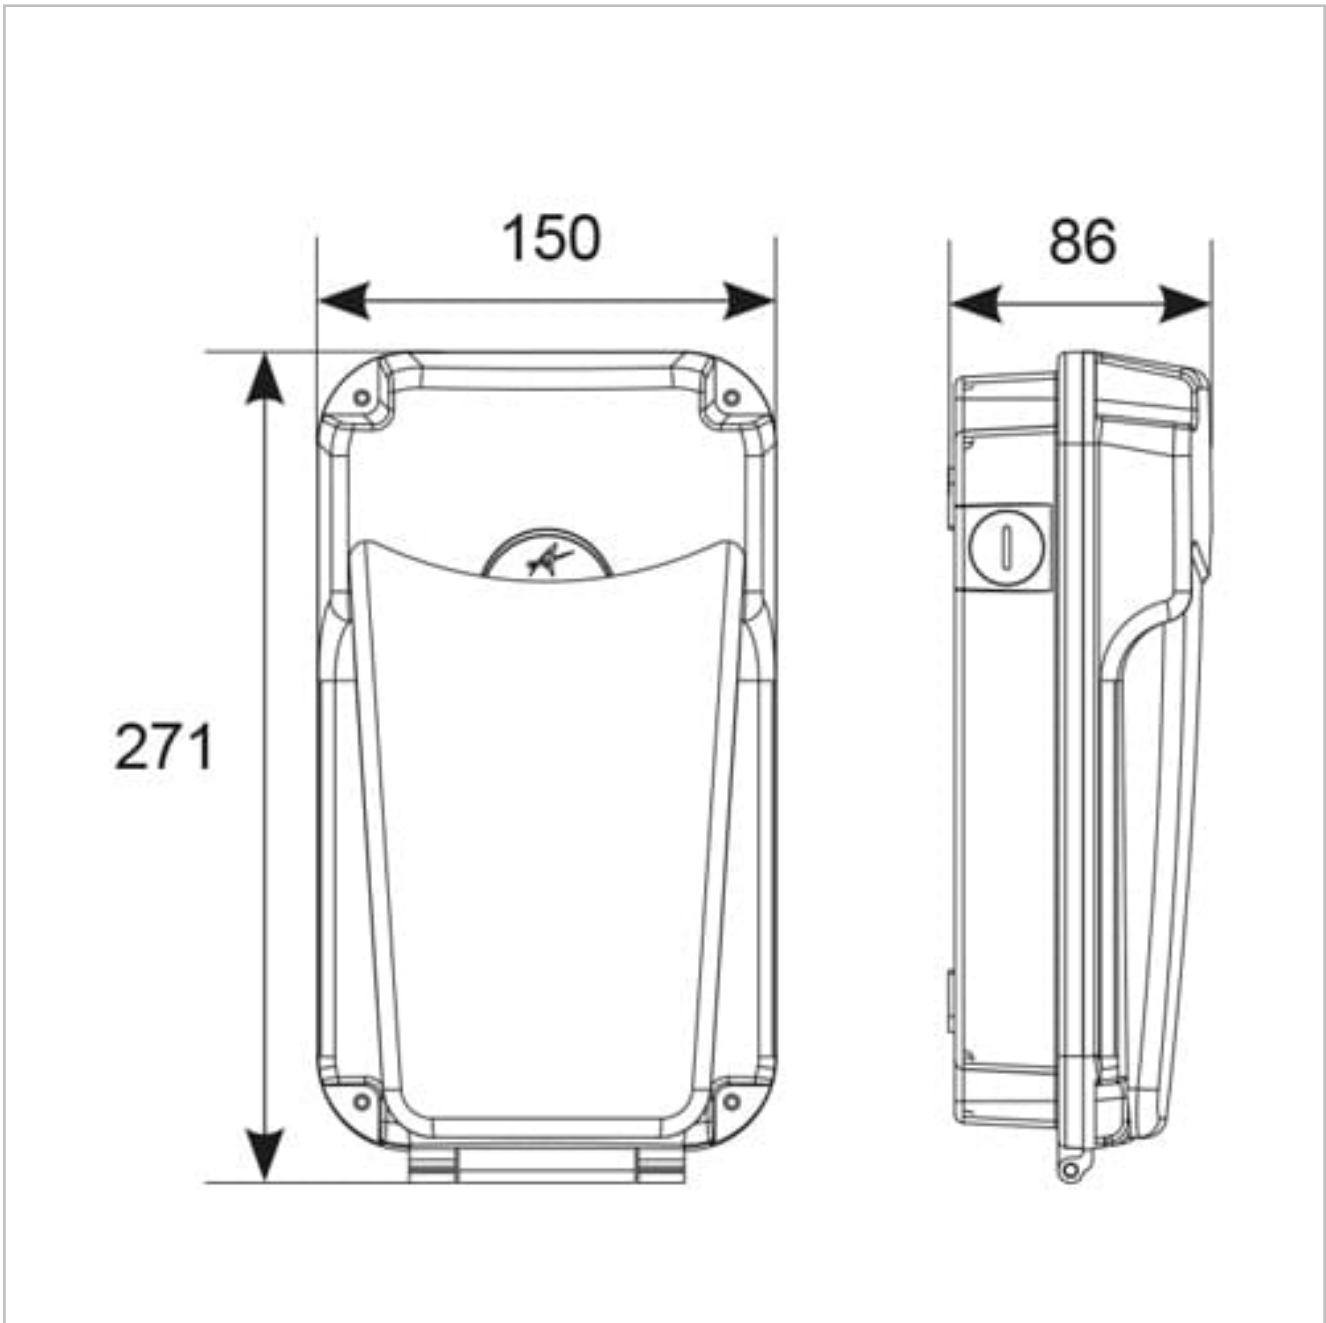

Datasheet generated from <https://onetimepim.com> last updated Thursday, October 6, 2022 8:27:11 AM