



## ATORLED2X4/110V/M3

Tornado 110V Twin 1200mm Emergency



### Features

110V non-corrosive LED batten suitable for all types of 110V site lighting

LED Performance allows point-to-point replacement of existing fluorescent luminaires

Unique luminaire fixing clip design allows option of mounting onto BESA box

Lockable heavy-duty stainless steel clips supplied as standard for added safety and security

Non-dimmable

Powered by Tridonic


## General Information

<b>Lamp Type</b>	LED
<b>Colour / Finish</b>	Yellow
<b>Emergency</b>	Yes
<b>Self Test</b>	Yes
<b>IP Rating</b>	IP65
<b>IK Rating</b>	IK07
<b>Class Protection</b>	1
<b>Internal / External</b>	Internal / External
<b>Surface / Recessed / Suspended</b>	Surface,Suspended
<b>Lifetime (Hrs)</b>	L70 54,000h
<b>Warranty (Years)</b>	3
<b>CE Mark</b>	Yes
<b>Length (mm)</b>	1,266 mm
<b>Width (mm)</b>	118 mm
<b>Height (mm)</b>	75 mm

# Technical Information

Wattage	40W
Lumens Delivered	4450lm
Lm/W	110lm/W
Beam Angle	105/125
CRI	80
CCT	4000K
Input	100/240V
Hertz	60Hz
Operating Temp	-20°C to 25°C
SDCM	5

Code	A	B	C	D
ATORLED2/110V	656	360	75	85
ATORLED4/110V	1266	860	75	85
ATORLED5/110V	1566	960	75	85
ATORLED2X2/110V	656	360	75	118
ATORLED2X4/110V	1266	860	75	118
ATORLED2X5/110V	1566	960	75	118

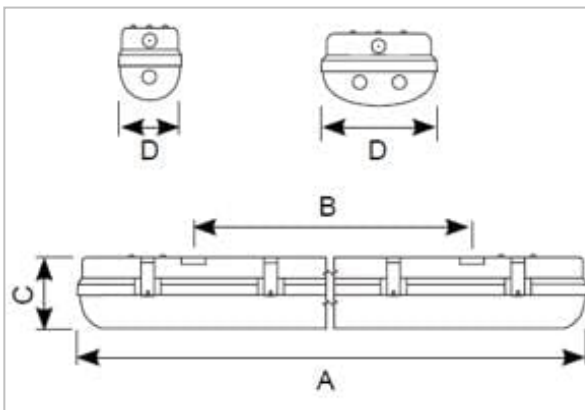

Datasheet generated from <https://onetimepim.com> last updated Thursday, October 13, 2022 10:04:15 PM