



ATORLED2X5/110V/M3

Tornado 110V Twin 1500mm Emergency



Features

110V non-corrosive LED batten suitable for all types of 110V site lighting

LED Performance allows point-to-point replacement of existing fluorescent luminaires

Unique luminaire fixing clip design allows option of mounting onto BESA box

Lockable heavy-duty stainless steel clips supplied as standard for added safety and security

Non-dimmable

Powered by Tridonic


General Information

Lamp Type	LED
Colour / Finish	Yellow
Emergency	Yes
Self Test	Yes
IP Rating	IP65
IK Rating	IK07
Class Protection	1
Internal / External	Internal / External
Surface / Recessed / Suspended	Surface,Suspended
Lifetime (Hrs)	L70 54,000h
Warranty (Years)	3
CE Mark	Yes
Length (mm)	1,566 mm
Width (mm)	118 mm
Height (mm)	75 mm

Technical Information

Wattage	58W
Lumens Delivered	6300lm
Lm/W	110lm/W
Beam Angle	105/125
CRI	80
CCT	4000K
Input	100/240V
Hertz	60Hz
Operating Temp	-20°C to 25°C
SDCM	5

Code	A	B	C	D
ATORLED2/110V	656	360	75	85
ATORLED4/110V	1266	860	75	85
ATORLED5/110V	1566	960	75	85
ATORLED2X2/110V	656	360	75	118
ATORLED2X4/110V	1266	860	75	118
ATORLED2X5/110V	1566	960	75	118

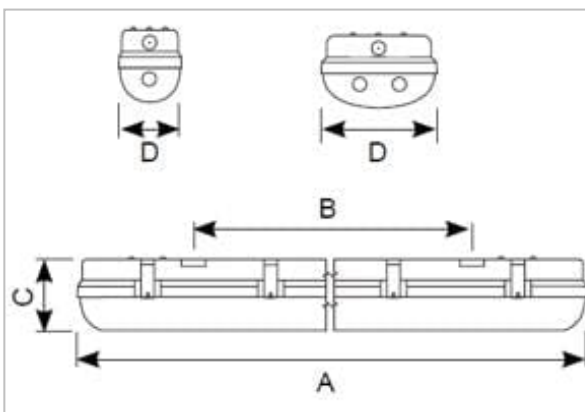

Datasheet generated from <https://onetimepim.com> last updated Thursday, October 13, 2022 10:04:16 PM