AULED80GIM/WW/OCTO

Unity 80 LED Gimbal - OCTO Smart Control Warm White 15W White

Features

Compact high performance professional adjustable downlight.

30° tilt angle.

Die-cast aluminium construction, powder coated and 30° cut-off angle.

Exceeds performance of 2x18W PLC.

Mirror finish anodized reflector.

Anti glare design to create visual comfort.

Remote driver with plug and play connection.

LED lifespan L70 50,000 hours.

Dimmable and emergency options.

General Information

Lamp Type	LED
Colour / Finish	White
OCTO Smart Control	Yes
IP Rating	IP20
Class Protection	2
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
Warranty (Years)	5
CE Mark	Yes
Diameter (mm)	90
Height (mm)	73

Technical Information

Wattage	15W
Lumens Delivered	896lm
Lm/W	60lm
Beam Angle	50
CRI	Ra 90
CCT	3000K
Input	230V
Hertz	50/60Hz
Operating Temp	-20°C to 25°C

Technical Data - ETIM - Downlight/spot/floodlight (EC001744)

Suitable for surface mounting	No
Suitable for built-in mounting	Yes
Suitable for wall mounting	No
Suitable for suspended mounting	No
Suitable for ceiling mounting	Yes
Suitable for traverse mounting	No
Suitable for pedestal/floor mounting	No
Suitable for light-track mounting	No
Adjustability	Swivelling
With movement sensor	No
With light sensor	No
With light source	Yes
Suitable for number of lamps	1
Material housing	Aluminium
Surface protection	Powder coating
Colour housing	White
Nominal voltage	230-230 V
Control gear included	Yes
Light distributor	Reflector
Beam angle	Wide beam 41-80°
Degree of protection (IP)	IP20
Protection class	II
Max. system power	15 W
Colour of light	White
Colour temperature	3000-3000 K

Colour rendering index CRI	90-100
Rated luminous flux acc. IEC 62722-2-1	896 lm
Lamp efficacy	60 lm/W
Height/depth	73 mm
Outer diameter	90 mm

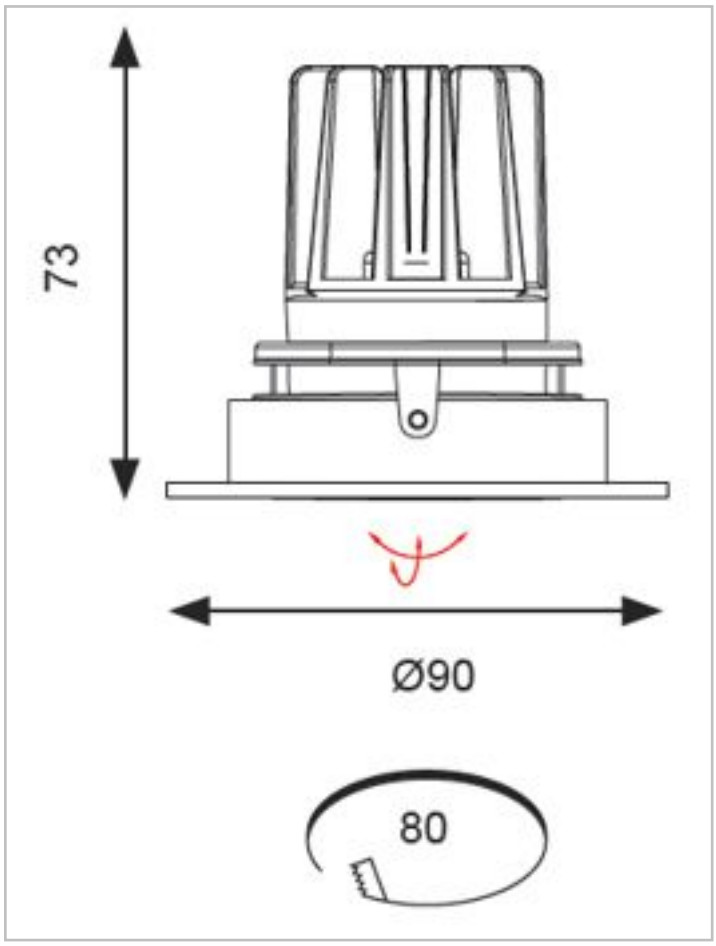

Datasheet generated from https://onetimepim.com last updated Friday, July 3, 2020 9:04:00 AM