



AVANTLED1/DD

Vantage CCT 1 Downlight Digital Dimming



Features

CCT selectable LED performance downlight suitable for commercial and education applications

Deep cut-off angle for glare control and comfort

One product provides 3000K, 4000K and 6500K colour temperature options

Downlight design allows installation into existing hole cut-outs from 68mm to 100mm

Powered by Tridonic

General Information

Lamp Type LED

Colour / Finish White

Dimmable Yes

Bluetooth Enabled Yes

IP Rating IP20

Class Protection 2

Internal / External Internal

Surface / Recessed / Suspended Recessed

Lifetime (Hrs) L80 60,000h

Warranty (Years) 5

CE Mark Yes


Diameter (mm) 82 mm

Height (mm) 54 mm

Technical Information

Wattage	8.5W
Lumens Delivered	740lm (4000K)
Lm/W	107lm/W (4000K)
Beam Angle	75
CRI	80
CCT	3000/4000/6500K
Input	220/240V
Hertz	50/60Hz
Operating Temp	-25°C to 40°C
SDCM	6
UGR	27

Datasheet generated from <https://onetimepim.com> last updated Thursday, October 13, 2022 10:01:18 PM

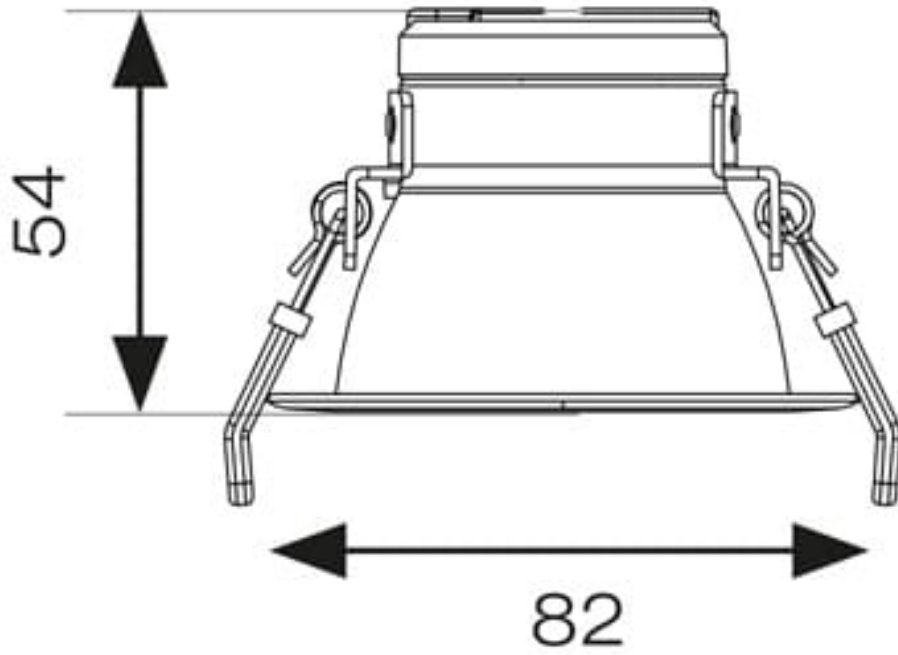

AVANTLED1