AZLED/2/DL

Z LED High Bay UFO 146W 6500K

Features

Robust LED low/high bay for industrial, commercial and retail applications

Pre-wired with 3m of H07RN-F cable for ease and speed of installation

Alternative installation options by means of drop rods, jack chain / catenary wire

146W comparable to 250W HQI

Die-cast powder coated construction and heatsink for optimum thermals and performance

TP(a) as standard

LED lifespan L70 50,000 hours

1-10V dimmable as standard

General Information

Lamp Type	LED
Colour / Finish	Black
IP Rating	IP65
IK Rating	IK08
Class Protection	1
Internal / External	Internal/External
Surface / Recessed / Suspended	Suspended
LED Life	L70 50,000hrs
Warranty (Years)	5
CE Mark	Yes
Diameter (mm)	320
Depth (mm)	178
Accessories	AZLED/REF, AZLED/FB1, AZLED/MWSP

Technical Information

Wattage	146W
Lumens Delivered	19064lm
Lm/W	127lm
CRI	Ra 80
CCT	6500K
Input	200-240V
Hertz	50/60Hz
Operating Temp	-40°C to 40°C

Technical Data - ETIM - High bay luminaire (EC001716)

Mounting method	Pendant
With light source	Yes
Suitable for number of lamps	1
Material housing	Aluminium
Nominal voltage	200-240 V
Control gear included	Yes
Dimming 1-10 V	Yes
Light distributor	Diffuser lens/optic/panel
Degree of protection (IP)	IP65
Impact strength	IK08
Protection class	I
Max. system power	151 W
Rated luminous flux acc. IEC 62722-2-1	19064 lm
Colour of light	White
Colour temperature	6500-6500 K
Colour rendering index CRI	80-89
Height/depth	178 mm
Outer diameter	320 mm
Suitable for emergency lighting	No

Datasheet generated from https://onetimepim.com last updated Sunday, March 29, 2020 11:32:56 AM

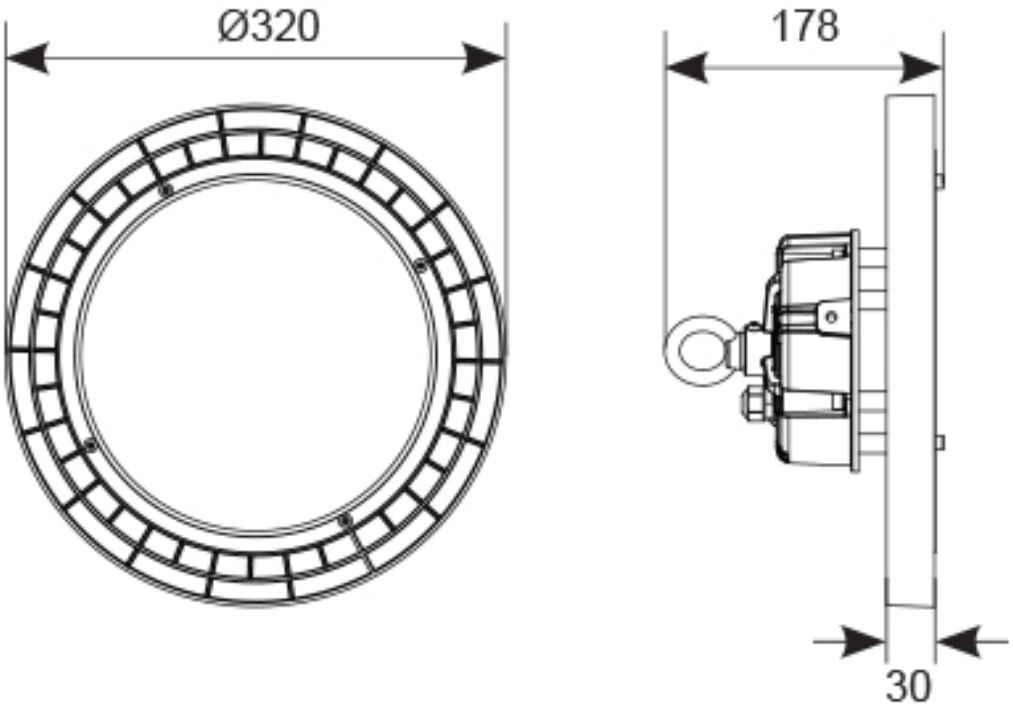
Ø320
178
30