A/3MT1/SS

Mains Voltage 16A Three Circuit Track 1 Metre - Satin Silver

Features

240V 16A mains track system

Three circuit connectivity provides multiple group switching options

Option of surface mounting or suspended

Track supplied c/w live end (Earth left) and dead end

Maximum mechanical loading of 50N

General Information

Colour / Finish	Satin Silver
IP Rating	IP20
Class Protection	1
Internal / External	Internal
Surface / Recessed / Suspended	Surface / Suspended
CE Mark	Yes
Length (mm)	1000
Width (mm)	32
Height (mm)	35
Accessories	AMTINS/W, AMTINS/B, AMTINS/SS

Technical Information

Amps	16A
Input	240V

Technical Data - ETIM - Light-track (EC000101)

Number of groups/phases	3
Nominal voltage	240-240 V
Shape	Rectangular
Colour	Silver
Surface-mounted	Yes
Suitable for suspended mounting	Yes
Bendable	No
Length	1000 mm
Width	32 mm
Height	35 mm
Protection class	I

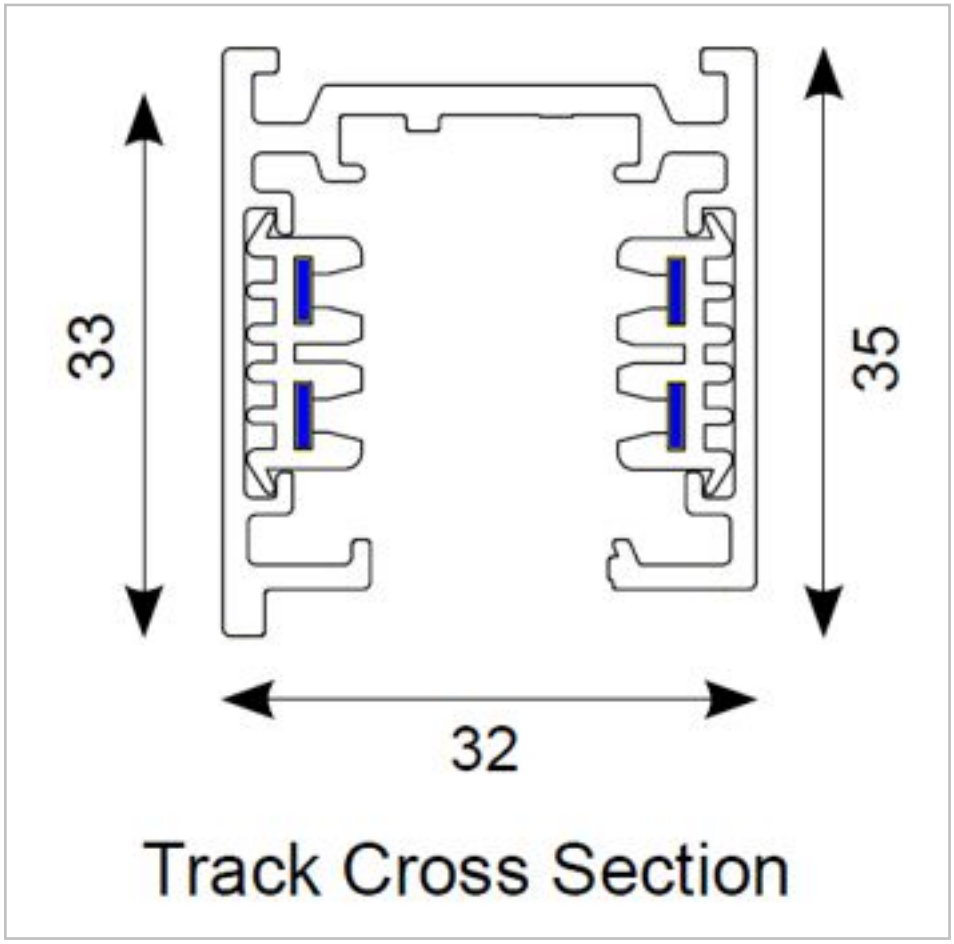

Datasheet generated from https://onetimepim.com last updated Monday, November 4, 2019 1:23:32 PM