A/3ULEDS1/SS

Three Circuit Unity 1 LED Mains 15W - Cool White - Satin Silver

Features

Compact LED trackspot with integral driver

Three circuit functionality allows for installations with multi-circuit requirement

Comparable performance to 100W halogen

355° rotation with 0-180° tilt on the bracket

Mirror finish anodized reflector

Anti-glare design to create visual comfort

LED lifespan L70 50,000 hours

Non-dimmable

General Information

Lamp Type	LED
Colour / Finish	Satin Silver
IP Rating	IP20
Class Protection	1
Internal / External	Internal
Warranty (Years)	5
CE Mark	Yes
Length (mm)	135
Diameter (mm)	60
Height (mm)	193
Accessories	A/3MON/GU10/W, A/3MON/GU10/B, A/3MON/GU10/SS

Technical Information

Wattage	15W
Lumens Delivered	946lm
Lm/W	63lm
Beam Angle	19
CRI	Ra 90
CCT	4000K
Input	230V
Hertz	50/60Hz
Operating Temp	-20°C to 25°C

Technical Data - ETIM - Downlight/spot/floodlight (EC001744)

Suitable for surface mounting	No
Suitable for built-in mounting	No
Suitable for wall mounting	No
Suitable for suspended mounting	No
Suitable for ceiling mounting	Yes
Suitable for traverse mounting	Yes
Suitable for pedestal/floor mounting	No
Suitable for light-track mounting	Yes
Adjustability	Rotating and swivelling
With movement sensor	No
With light sensor	No
Suitable for number of lamps	1
Colour housing	Silver
Control gear included	Yes
Degree of protection (IP)	IP20
Protection class	I
Max. system power	15 W
Colour of light	White
Colour temperature	4000-4000 K
Colour rendering index CRI	90-100
Rated luminous flux acc. IEC 62722-2-1	946 lm
Lamp efficacy	63 lm/W
Outer diameter	60 mm

Datasheet generated from https://onetimepim.com last updated Monday, November 4, 2019 1:50:20 PM

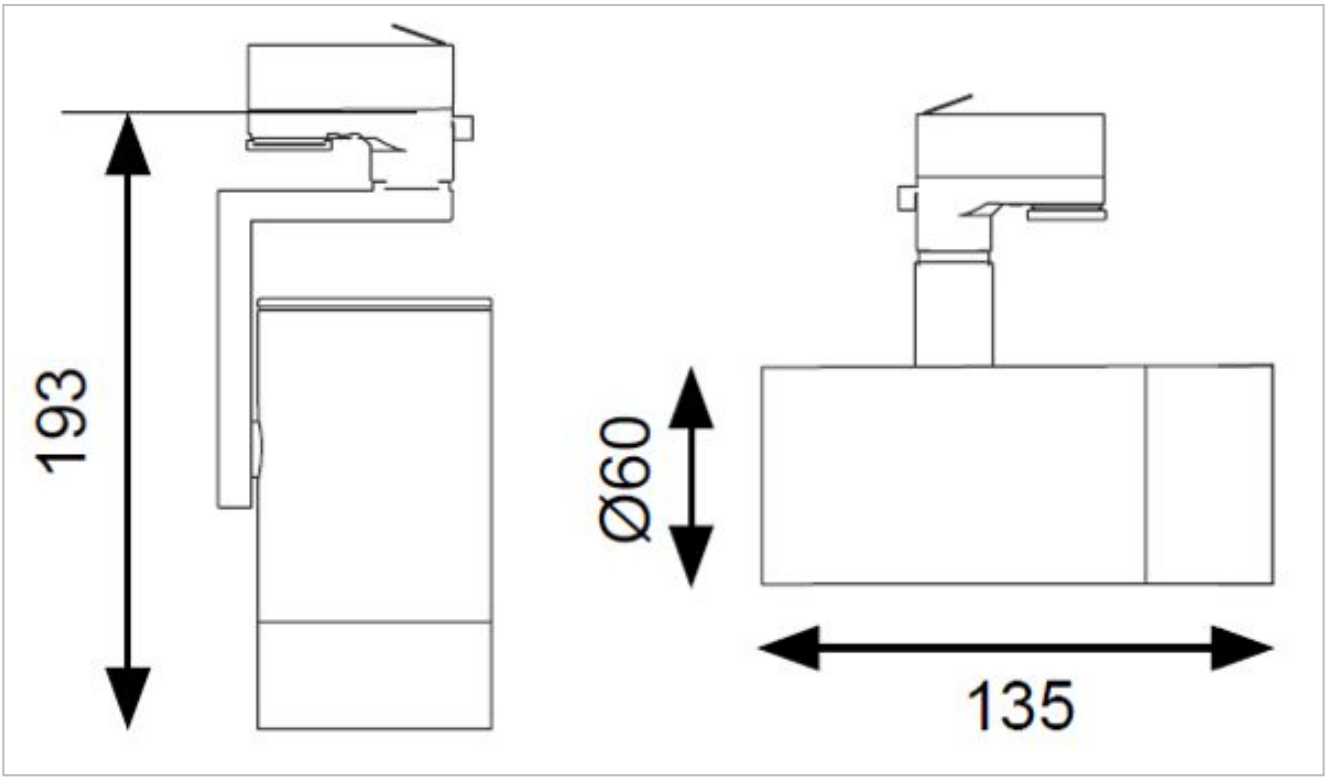
193
Ø60
135