AHARLED/3M/ST

Features

Compact high performance IP65 polycarbonate surface emergency luminaire.

Self-test as standard.

Optional hanging blade legends (supplied with self-adhesive legend as standard) for enhanced appearance.

Aesthetically designed for modern appearance.

20mm side and rear cable entries.

High output LED performance and distribution allows maximum spacing providing reduced cost.

Viewing distance 25 metres.

General Information

Lamp Type	LED
Colour / Finish	White
Self Test	Yes
Minimum Recharge Period	24 hours
IP Rating	IP65
Class Protection	1
Internal / External	Internal/External
Surface / Recessed / Suspended	Surface
LED Life	L70 50,000hrs
Warranty (Years)	3
CE Mark	Yes
Length (mm)	336
Width (mm)	130
Height (mm)	
Accessories	AHARLED/L/ALAR, AHARLED/L/AD, AHARLED/L/AU, ASBP/5

Technical Information

Wattage	5W
Lumens Delivered	142lm (Emergency), 299lm (Standard)
CCT	6500K
Input	230V
Hertz	50/60Hz
Operating Temp	0C° to 40C°

Technical Data - ETIM - Emergency luminaire (EC001957)

Mounting method	Ceiling surface mounting
Function	Escape route lighting/signage
Monitoring equipment	Automatic self test
With light source	Yes
Material housing	Plastic
Colour housing	White
Nominal voltage	230-230 V
Degree of protection (IP)	IP65
Protection class	I
Max. system power	5 W
Rated luminous flux acc. IEC 62722-2-1	299 lm
Colour temperature	6500-6500 K
Recognition distance	25 m
Width	130 mm
Length	336 mm

Datasheet generated from https://onetimepim.com last updated Monday, September 6, 2021 1:25:56 PM

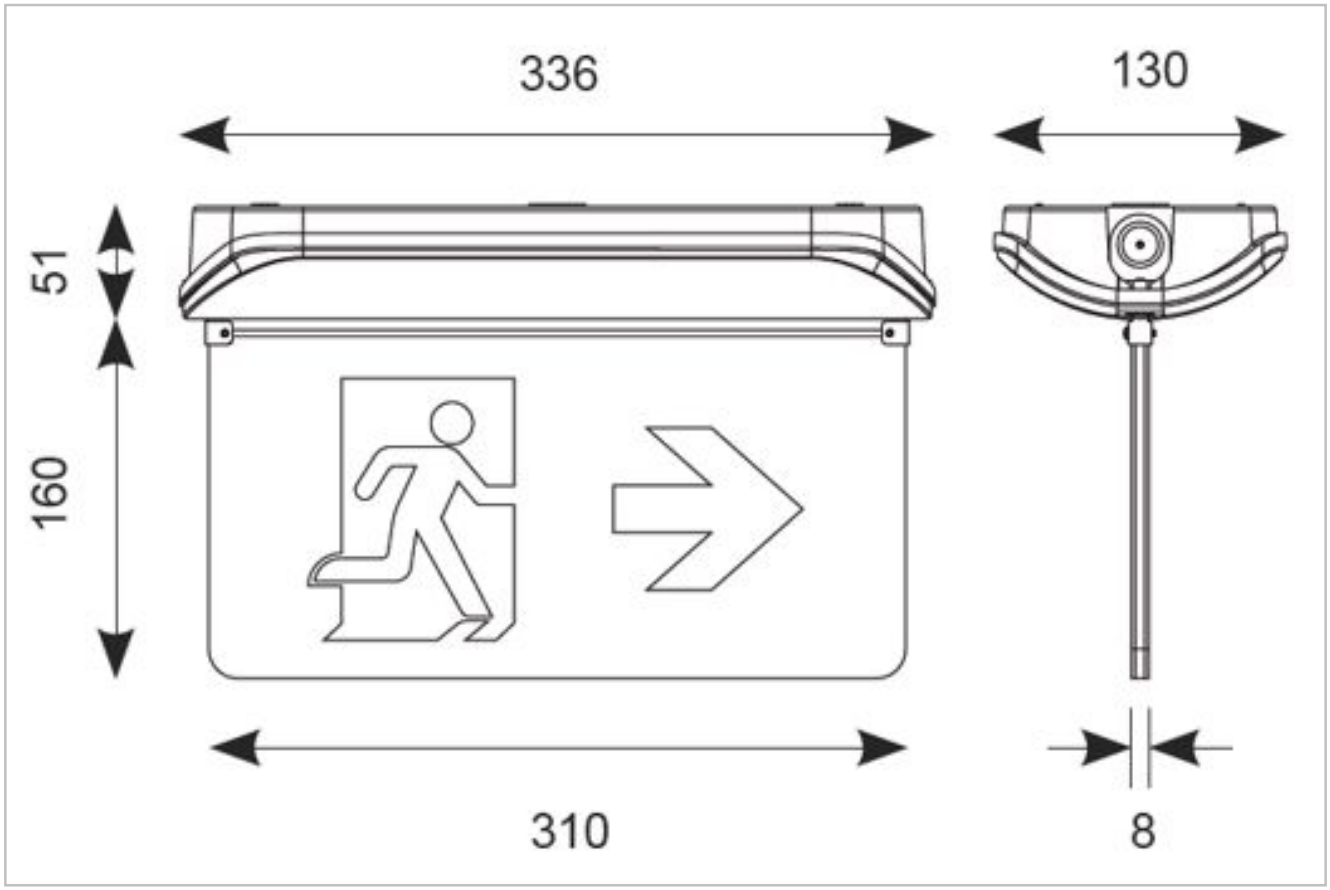
336
130
51
160
310
8