ALAZPLED2

Features

High performance LED projector light

Push fit loop-in loop-out for ease of installation

Integrated AC LED technology

Die-cast aluminium construction with textured graphite paint finish

Cross anti-glare and hood accessory available

LED lifespan L70 33,000 hours

Non-dimmable

General Information

Lamp Type	LED
Colour / Finish	Graphite
IP Rating	IP66
Class Protection	1
Internal / External	External
Surface / Recessed / Suspended	Surface
Warranty (Years)	3
CE Mark	Yes
Length (mm)	154
Width (mm)	161.5
Height (mm)	263
Accessories	ALAZPLED/C, ALAZPLED/H

Technical Information

Wattage	30W
Lumens Delivered	2581lm
Lm/W	86lm
Beam Angle	28
CRI	Ra 80
CCT	3000K
Input	220-240V
Hertz	50Hz
Operating Temp	-20°C to 40°C

Datasheet generated from https://onetimepim.com last updated Friday, March 26, 2021 11:29:19 AM

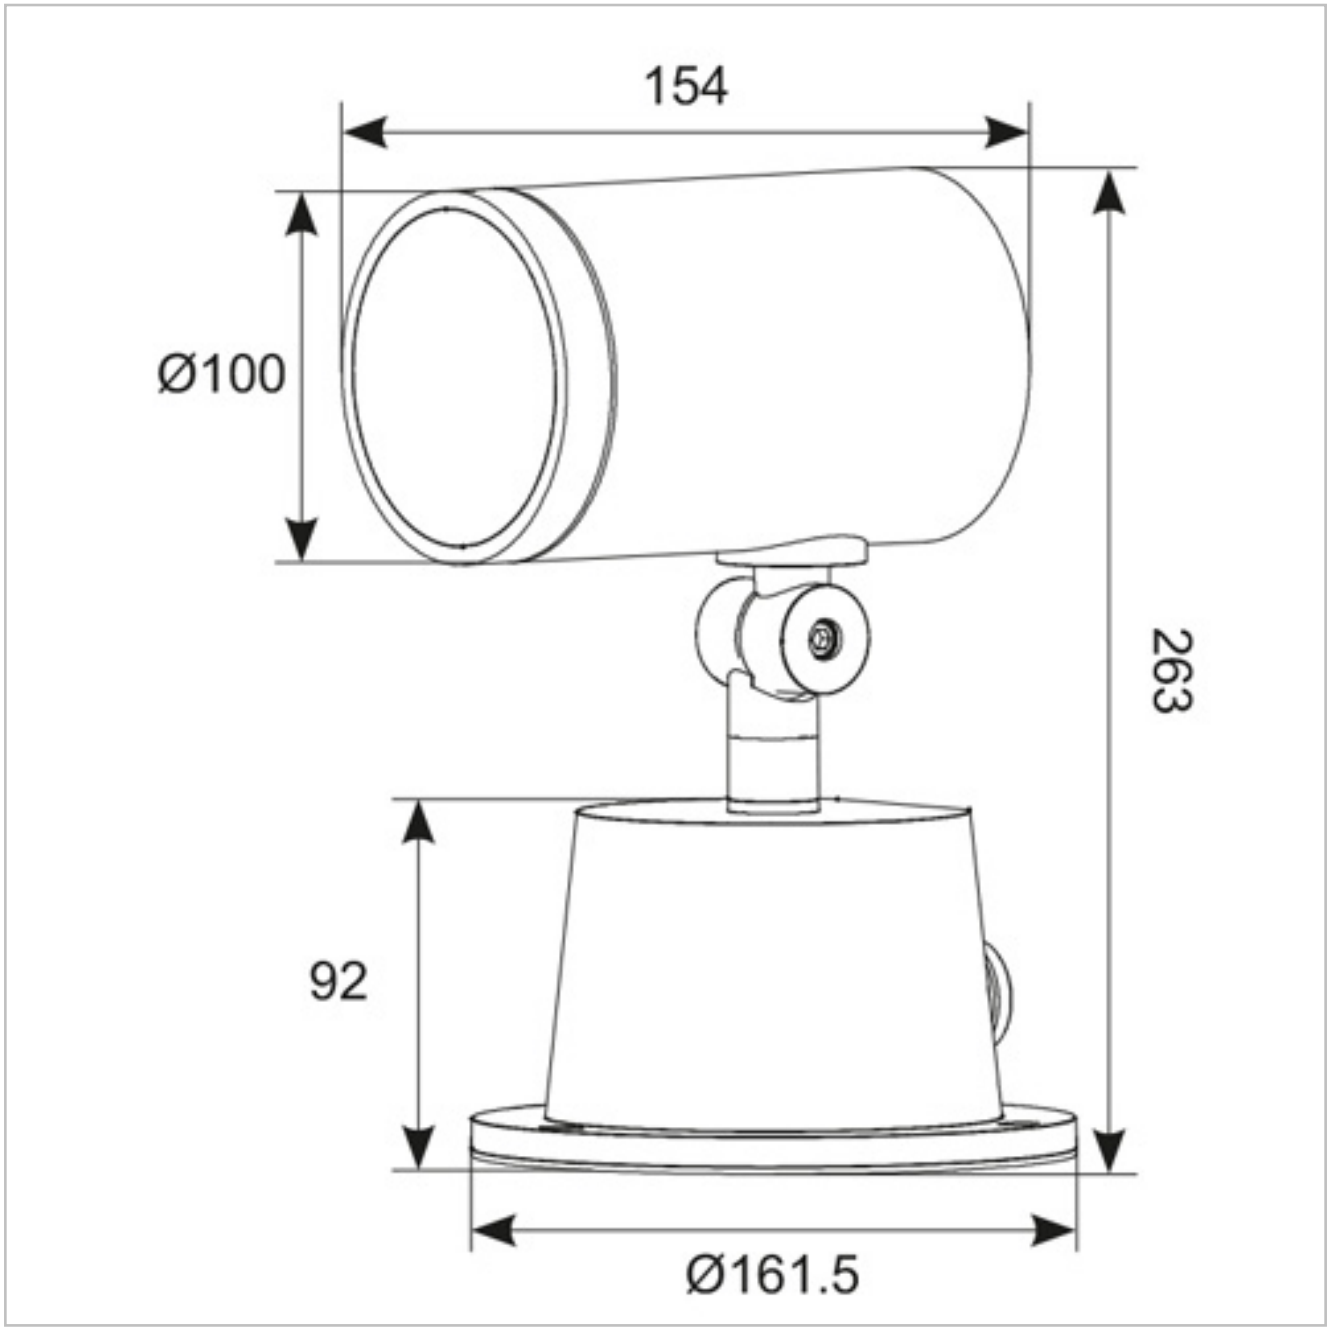
154
Ø100
263
92
Ø161.5