# APRILEDP/G/SC

## Features

220-240V LED 4 CCT selectable fire rated gimbal

30° tilt angle

Remote driver with 2x1.5mm² + CPC loop-in, loop-out colour coded push fit piano terminals provide an easy and efficient installation

Detachable LED driver for fast fix install

Low profile design and remote driver allow installation into shallow ceiling voids

Fully tested for 30, 60 and 90 minute ceiling types to meet Part B of building regulations

Fully tested to meet Part E (acoustic) of building regulations

Wide 60° beam angle for increased light distribution

LED lifespan L70 60,000 hours

# General Information

| | |
|---|---|
| **Lamp Type** | LED |
| **Colour / Finish** | Satin Chrome |
| **Fire Rated** | Yes |
| **OCTO Compatibility** | Smart Indoor controller |
| **IP Rating** | IP20 |
| **Class Protection** | 1 |
| **Internal / External** | Internal |
| **Surface / Recessed / Suspended** | Recessed |
| **Warranty (Years)** | 5 |
| **CE Mark** | Yes |
| **Diameter (mm)** | 86 |
| **Height (mm)** | 58 |
| **Accessories** | AORBLED/DIMMER |

# Technical Information

| | |
|---|---|
| **Wattage** | 7W |
| **Lumens Delivered** | 620lm(2700K) 655lm(3000K) 698lm(4000K) 659lm(6000K) |
| **Lm/W** | 89lm(2700K) 94lm(3000K) 100lm(4000K) 94lm(6000K) |
| **Beam Angle** | 60 |
| **CRI** | Ra 80 |
| **CCT** | 2700K/3000K/4000K/6000K |
| **Input** | 230V |
| **Hertz** | 50/60Hz |
| **Operating Temp** | -5°C to 25°C |

# Technical Data - ETIM - Downlight/spot/floodlight (EC001744)

| | |
|---|---|
| **Suitable for surface mounting** | No |
| **Suitable for built-in mounting** | Yes |
| **Suitable for wall mounting** | No |
| **Suitable for suspended mounting** | No |
| **Suitable for ceiling mounting** | Yes |
| **Suitable for traverse mounting** | No |
| **Suitable for pedestal/floor mounting** | No |
| **Suitable for light-track mounting** | No |
| **Adjustability** | Swivelling |
| **With movement sensor** | No |
| **With light sensor** | No |
| **With light source** | Yes |
| **Suitable for number of lamps** | 1 |
| **Colour housing** | Chrome |
| **Nominal voltage** | 230-230 V |
| **Control gear included** | Yes |
| **Beam angle** | Wide beam 41-80° |
| **Degree of protection (IP)** | IP20 |
| **Protection class** | I |
| **Max. system power** | 7 W |
| **Colour of light** | White |
| **Colour temperature** | 2700-6000 K |
| **Colour rendering index CRI** | 80-89 |
| **Luminous flux** | 620-698 lm |
| **Lamp efficacy** | 100 lm/W |

| | |
|---|---|
| **Height/depth** | 58 mm |
| **Length** | 67 mm |
| **Outer diameter** | 86 mm |

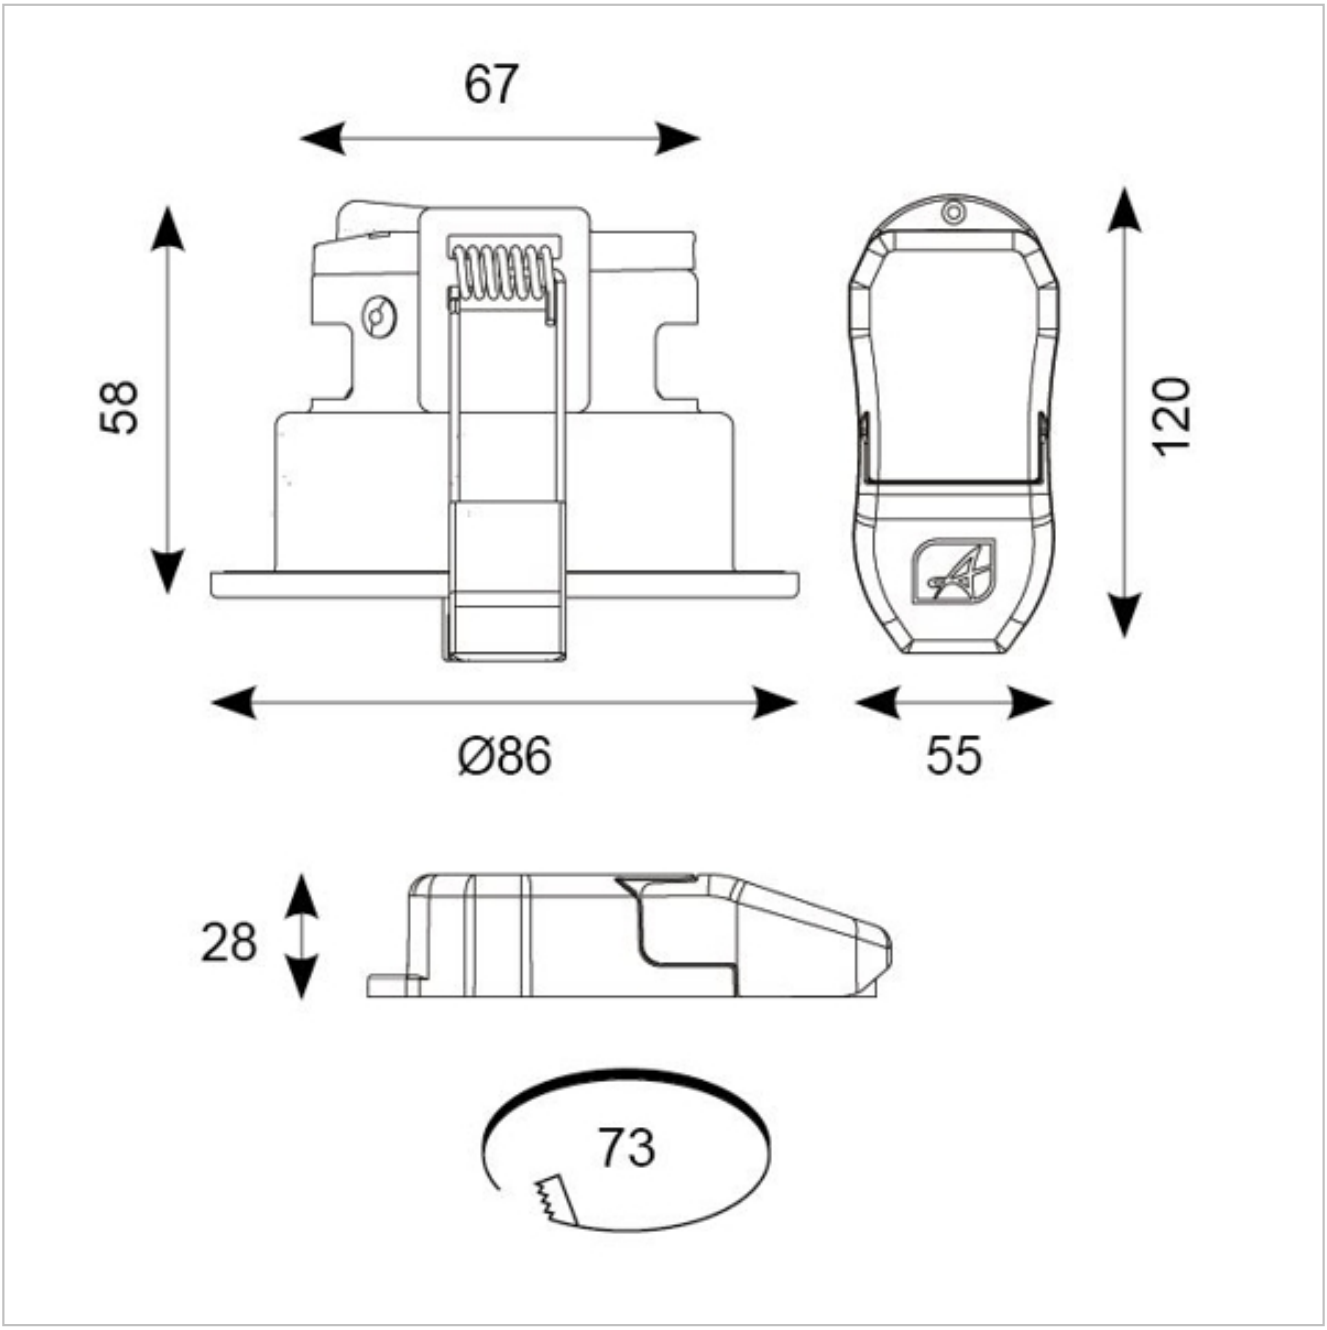


Datasheet generated from https://onetimepim.com last updated Tuesday, December 1, 2020 9:47:24 AM