ARLEDTL/WW

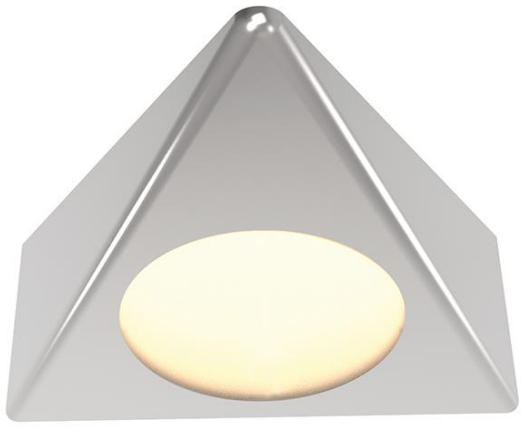

Features

AC 230V mains surface under cabinet downlight.

Integrated AC LED technology.

Pre-wired with 1.5 metres of mains cable for fast installation.

Direct replacement for traditional halogen.

LED lifespan L70 54,000 hours.

Non-dimmable.

General Information

Lamp Type	LED
Colour / Finish	Satin Chrome
IP Rating	IP20
Class Protection	2
Internal / External	Internal
Surface / Recessed / Suspended	Surface
Warranty (Years)	2
CE Mark	Yes
Length (mm)	120
Width (mm)	129
Height (mm)	46

Technical Information

Wattage	2W
Lumens Delivered	111lm
Lm/W	56lm
CRI	Ra 80
CCT	3000K
Input	230V
Hertz	50/60Hz
Operating Temp	-10°C to 40°C

Technical Data - ETIM - Downlight/spot/floodlight (EC001744)

Suitable for surface mounting	Yes
Suitable for built-in mounting	No
Suitable for wall mounting	No
Suitable for suspended mounting	No
Suitable for traverse mounting	No
Suitable for pedestal/floor mounting	No
Suitable for light-track mounting	No
Adjustability	Not adjustable
With movement sensor	No
With light sensor	No
With light source	Yes
Suitable for number of lamps	1
Colour housing	Chrome
Nominal voltage	230-230 V
No dim function	Yes
Degree of protection (IP)	IP20
Protection class	II
Max. system power	2 W
Colour of light	White
Colour temperature	3000-3000 K
Colour rendering index CRI	80-89
Rated luminous flux acc. IEC 62722-2-1	111 lm
Lamp efficacy	56 lm/W
Width	129 mm
Height/depth	46 mm

Length	120 mm

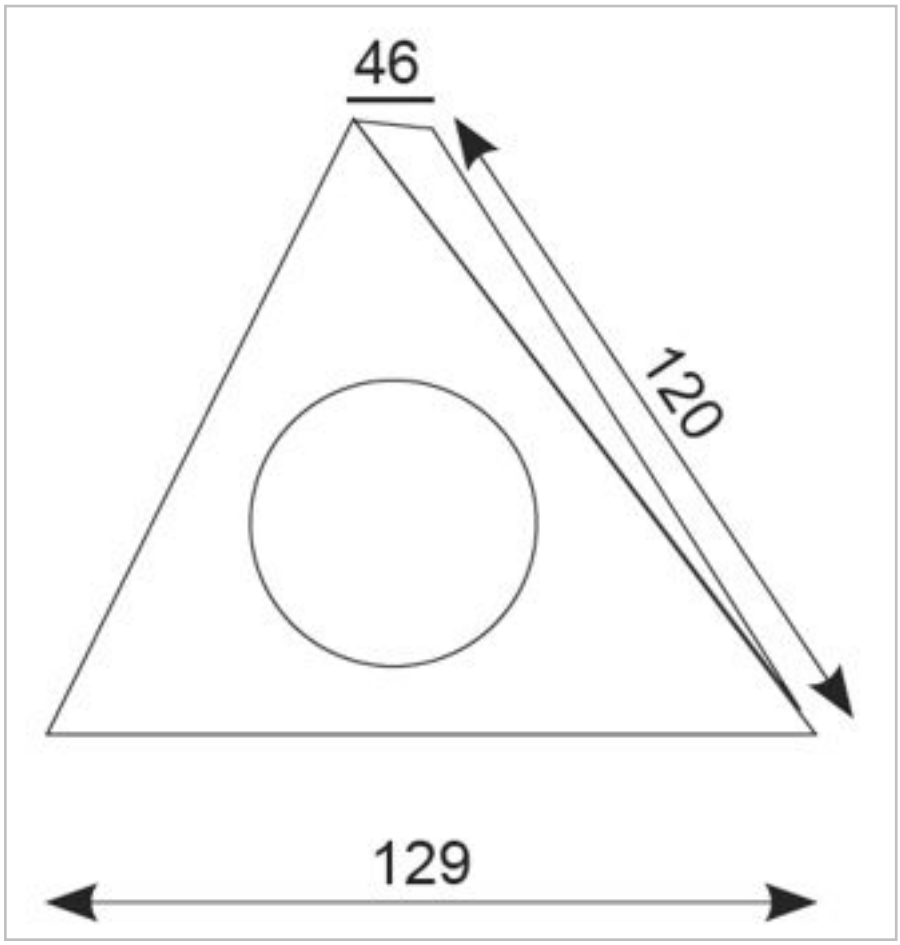

Datasheet generated from https://onetimepim.com last updated Monday, September 6, 2021 1:19:40 PM