ATORLED5/M3

Features

LED Performance allows point-to-point replacement of existing fluorescent luminaires.

Light output exceeds performance of T8 and T5 fluorescent.

Unique luminaire fixing clip design allows option of mounting onto BESA box.

Lockable heavy-duty stainless steel clips supplied as standard for added safety and security.

LED lifespan L70 30,000 hours.

Self-test emergency as standard.

General Information

Lamp Type	LED
Colour / Finish	Grey
Emergency	Yes
Self Test	Yes
IP Rating	IP65
IK Rating	IK07
Class Protection	1
Internal / External	Internal/External
Surface / Recessed / Suspended	Surface/Suspended
Warranty (Years)	5
CE Mark	Yes
Length (mm)	1566
Width (mm)	85
Height (mm)	75

Technical Information

Wattage	28W
Lumens Delivered	3230lm
Lm/W	115lm
CRI	Ra 80
CCT	4000K
Input	230V
Hertz	50Hz
Operating Temp	-10°C to 40°C

Technical Data - ETIM - Ceiling-/wall luminaire (EC002892)

Suitable for wall mounting	No
Suitable for suspended mounting	Yes
Suitable for ceiling mounting	Yes
Suitable for built-in mounting	No
Suitable for surface mounting	Yes
With light source	Yes
Colour housing	Grey
Nominal voltage	230-230 V
Control gear included	Yes
No dim function	Yes
Degree of protection (IP)	IP65
Impact strength	IK07
Protection class	I
Suitable for emergency lighting	Yes
With movement sensor	No
With light sensor	No
Max. system power	28 W
Rated luminous flux acc. IEC 62722-2-1	3230 lm
Colour of light	White
Colour temperature	4000-4000 K
Colour rendering index CRI	80-89
Luminaire efficacy	115 lm/W
Width	85 mm
Height/depth	75 mm
Length	1566 mm

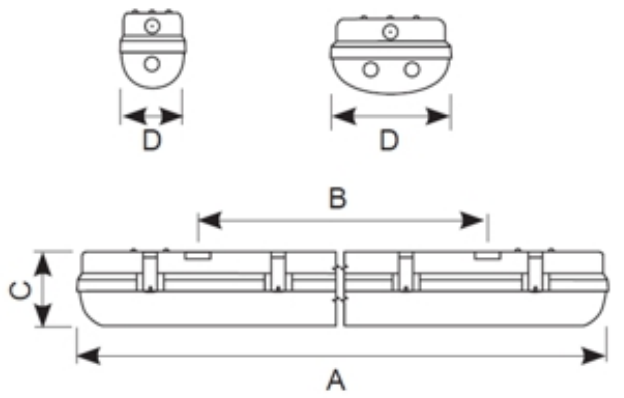

Code	A	B	C	D
ATORLED4	1266	860	75	85
ATORLED5	1566	960	75	85
ATORLED6	1866	1030	80	85
ATORLED2X4	1266	860	75	118
ATORLED2X5	1566	960	75	118
ATORLED2X6	1855	1030	80	118

Datasheet generated from https://onetimepim.com last updated Tuesday, December 1, 2020 9:50:09 AM