# AVANTLED1/DD

## Features

CCT selectable LED performance downlight suitable for commercial and education applications

Deep cut-off angle for glare control and comfort

One product provides 3000K,4000K and 6500K colour temperature options

Downlight design allows installation into existing hole cut-outs from 68mm to 100mm

Powered by Tridonic

## General Information

| | |
|---|---|
| **Lamp Type** | LED |
| **Colour / Finish** | White |
| **Dimmable** | Yes |
| **IP Rating** | IP20 |
| **Class Protection** | 2 |
| **Internal / External** | Internal |
| **Surface / Recessed / Suspended** | Recessed |
| **Lifetime (Hrs)** | L80 60,000 |
| **Warranty (Years)** | 5 |
| **CE Mark** | Yes |
| **Diameter (mm)** | 82 |
| **Height (mm)** | 54 |

## Technical Information

| | |
|---|---|
| **Wattage** | 8.5W |
| **Lumens Delivered** | 740lm (4000K) |
| **Lm/W** | 107lm (4000K) |
| **Beam Angle** | 75 |
| **CRI** | Ra 80 |
| **CCT** | 3000K/4000K/6500K |
| **Input** | 230V |
| **Hertz** | 50Hz |
| **Operating Temp** | -25°C to 40°C |
| **SDCM** | 6 |
| **UGR** | 26 |

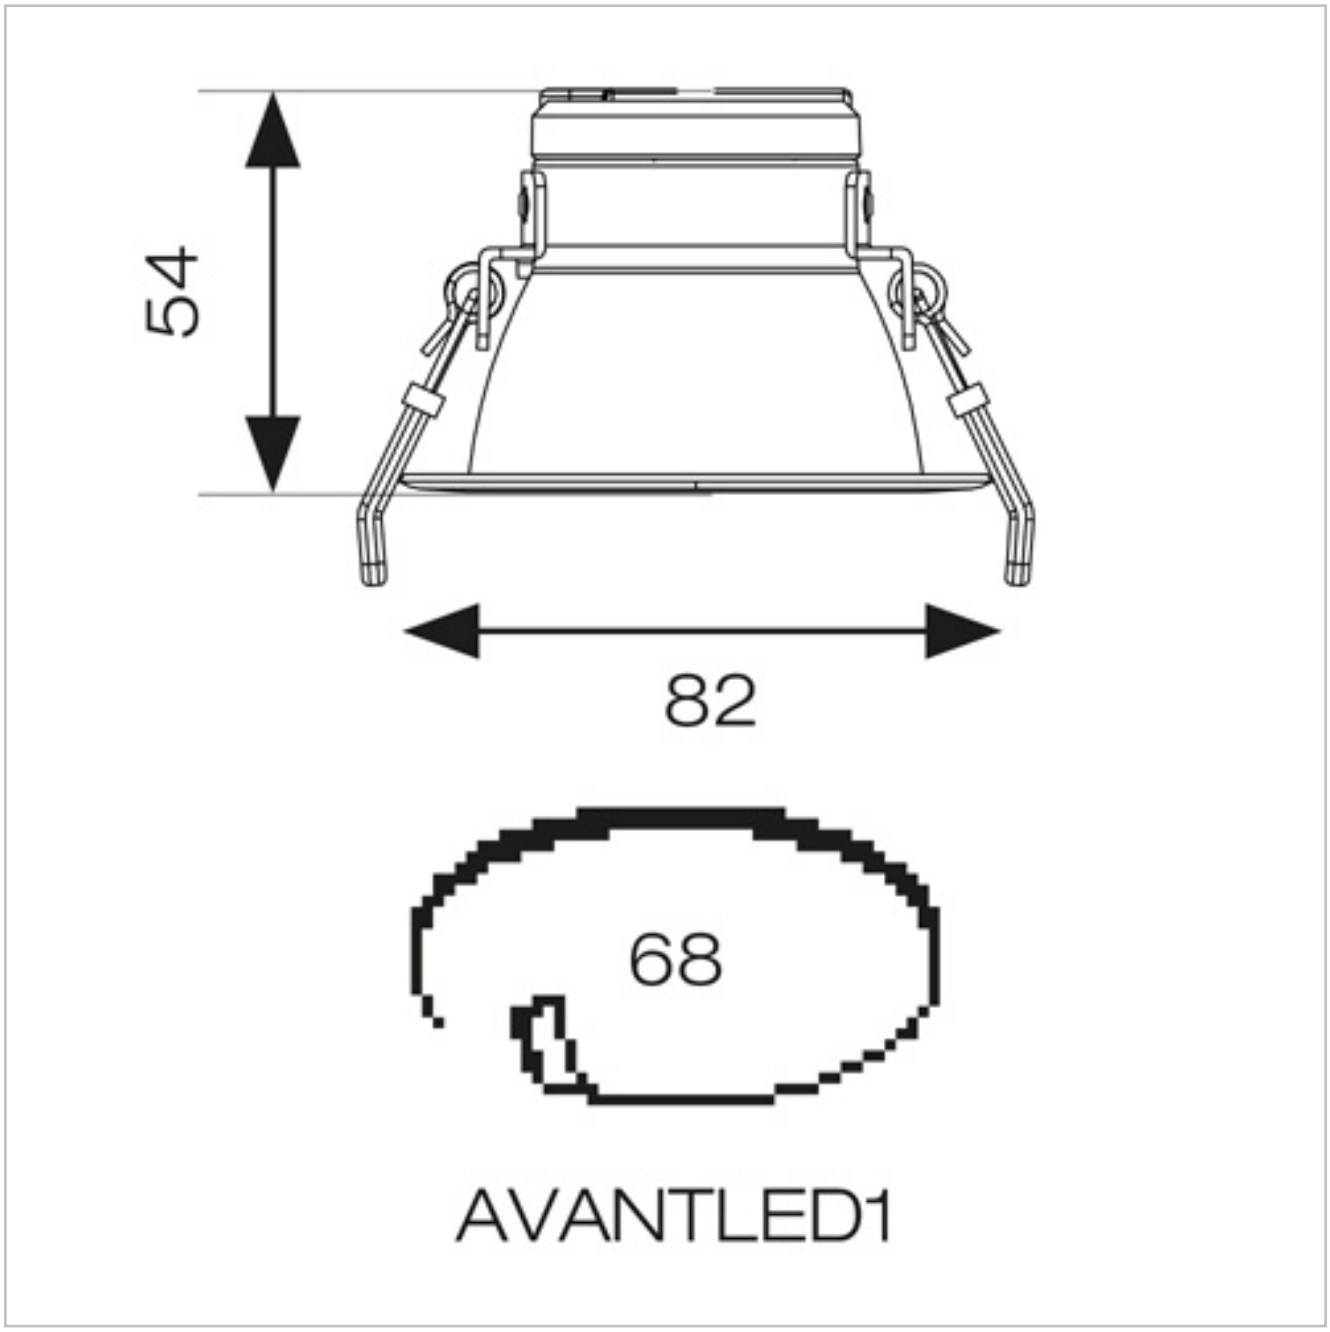


Datasheet generated from https://onetimepim.com last updated Wednesday, June 15, 2022 8:56:10 AM