



AVANTLED1



Features

CCT selectable LED performance downlight suitable for commercial and education applications

Deep cut-off angle for glare control and comfort

One product provides 3000K, 4000K and 6500K colour temperature options

Downlight design allows installation into existing hole cut-outs from 68mm to 100mm

Powered by Tridonic



General Information

| | |
|--------------------------------|------------|
| Lamp Type | LED |
| Colour / Finish | White |
| IP Rating | IP20 |
| Class Protection | 2 |
| Internal / External | Internal |
| Surface / Recessed / Suspended | Recessed |
| Lifetime (Hrs) | L80 60,000 |
| Warranty (Years) | 5 |
| CE Mark | Yes |
| Diameter (mm) | 82 |
| Height (mm) | 54 |

Technical Information

| | |
|------------------|-------------------|
| Wattage | 8.5W |
| Lumens Delivered | 740lm (4000K) |
| Lm/W | 107lm (4000K) |
| Beam Angle | 75 |
| CRI | Ra 80 |
| CCT | 3000K/4000K/6500K |
| Input | 230V |
| Hertz | 50Hz |
| Operating Temp | -25°C to 40°C |
| SDCM | 6 |
| UGR | 26 |

Datasheet generated from <https://onetimepim.com> last updated Tuesday, April 26, 2022 10:27:33 AM

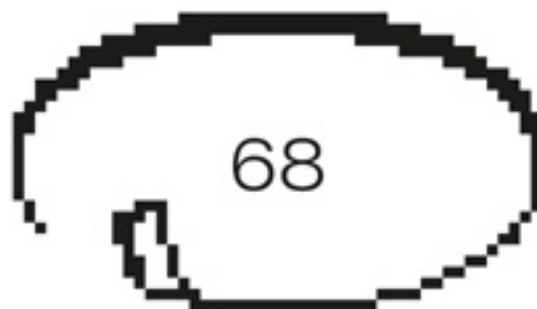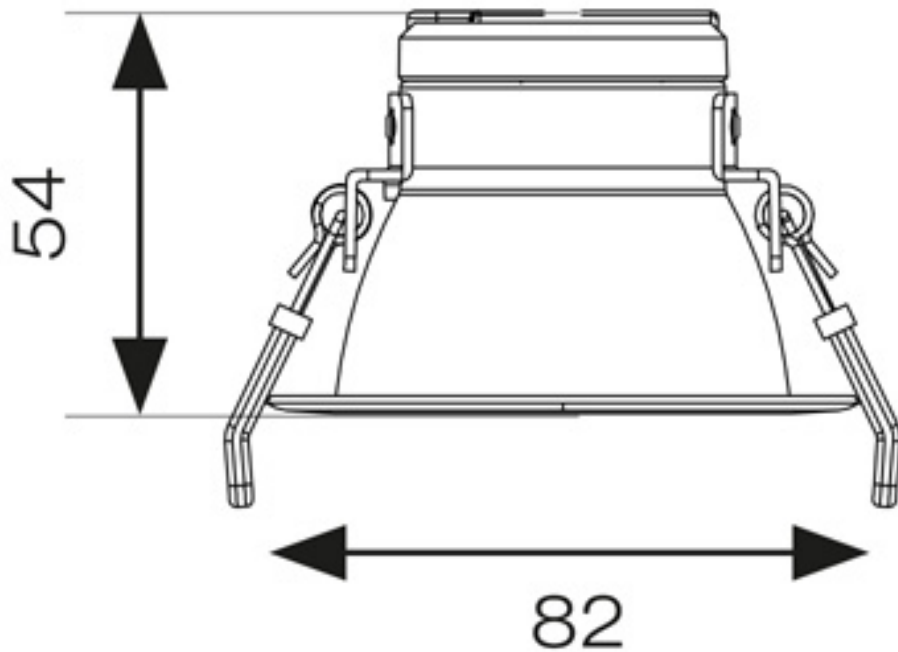

AVANTLED1