AVANTLED1/OCTO/SM3

Features

CCT selectable LED performance downlight suitable for commercial and education applications

Deep cut-off angle for glare control and comfort

One product provides 3000K,4000K and 6500K colour temperature options

Downlight design allows installation into existing hole cut-outs from 68mm to 100mm

Powered by Tridonic

General Information

Lamp Type	LED
Colour / Finish	White
Emergency	Yes
Self Test	Yes
OCTO Smart Control	Yes
IP Rating	IP20
Class Protection	2
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
Lifetime (Hrs)	L80 60,000
Warranty (Years)	5
CE Mark	Yes
Diameter (mm)	82
Height (mm)	54

Technical Information

Wattage	8.5W
Lumens Delivered	740lm (4000K)
Lm/W	107lm (4000K)
Beam Angle	75
CRI	Ra 80
CCT	3000K/4000K/6500K
Input	230V
Hertz	50Hz
Operating Temp	-25°C to 40°C
SDCM	6
UGR	26

Datasheet generated from https://onetimepim.com last updated Tuesday, April 26, 2022 10:27:34 AM

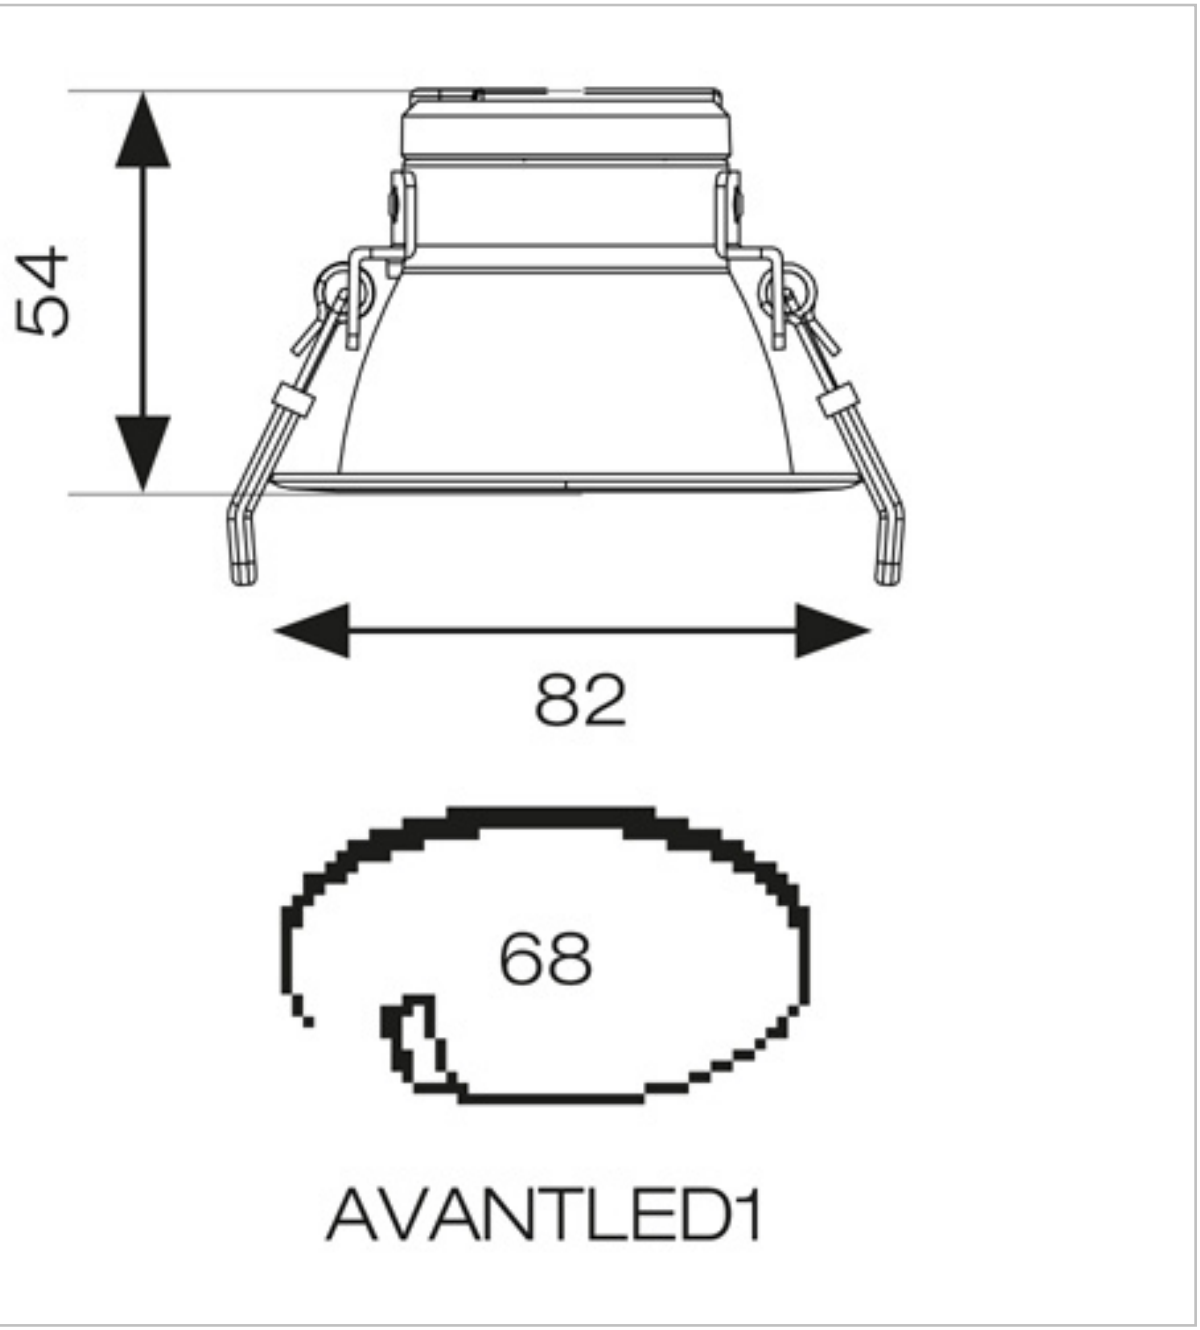
54
82
68
AVANTLED1