



AVANTLED4/OCTO



Features

CCT selectable LED performance downlight suitable for commercial and education applications

Deep cut-off angle for glare control and comfort

One product provides 3000K, 4000K and 6500K colour temperature options

Downlight design allows installation into existing hole cut-outs from 150mm to 200mm


Powered by Tridonic

General Information

Lamp Type	LED
Colour / Finish	White
OCTO Smart Control	Yes
IP Rating	IP20
Class Protection	2
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
Lifetime (Hrs)	L80 60,000
Warranty (Years)	5
CE Mark	Yes
Diameter (mm)	230
Height (mm)	128

Technical Information

Wattage	27W
Lumens Delivered	3150lm (4000K)
Lm/W	121lm (4000K)
Beam Angle	75
CRI	Ra 80
CCT	3000K/4000K/6500K
Input	230V
Hertz	50Hz
Operating Temp	-25°C to 40°C
SDCM	6
UGR	26

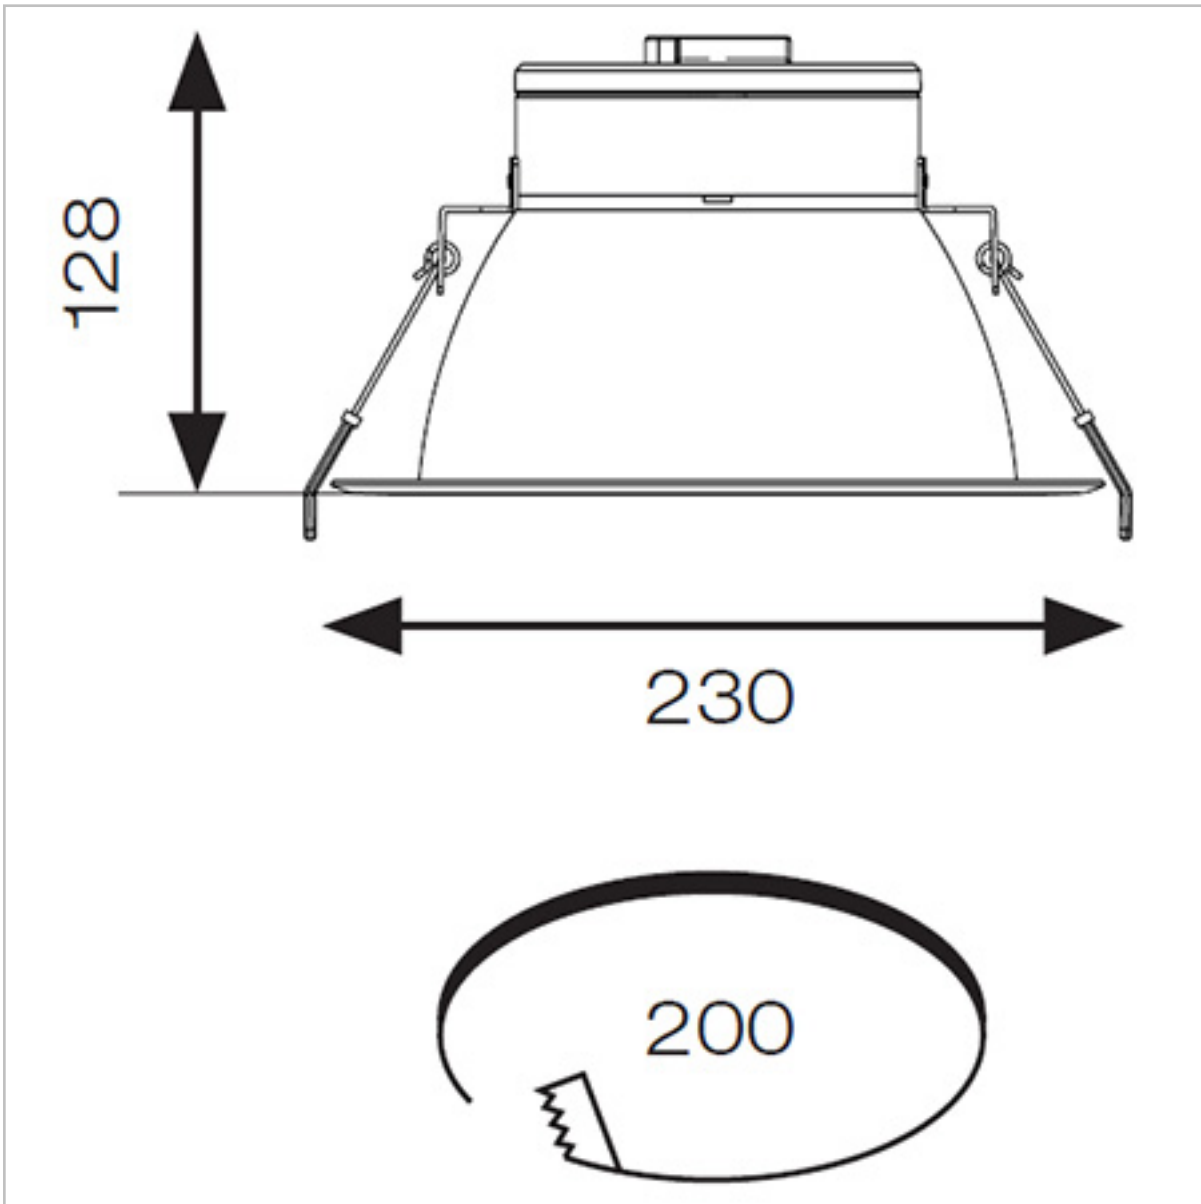

Datasheet generated from <https://onetimepim.com> last updated Wednesday, May 4, 2022 9:29:51 AM