AVASLED

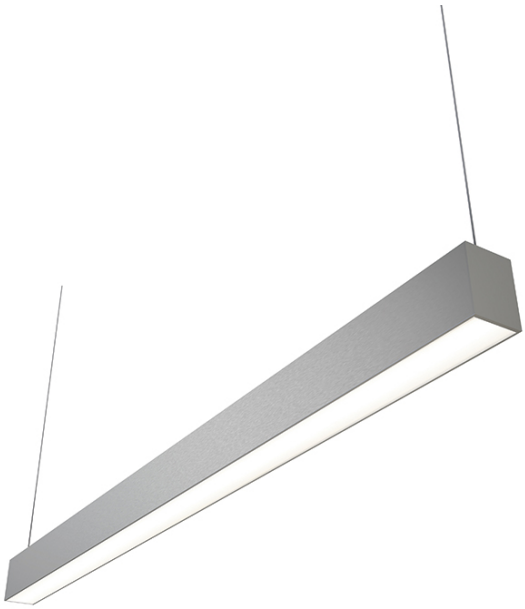

Features

Suspended linear for commercial applications

Aluminium extruded construction with integral driver

Supplied bi-directional light output as standard with 70% downward light and 30% upward light ratio (directional only option can be selected if required)

50W exceeds performance of 2x28W T5

Opal diffuser provides optimal light uniformity

Selectable CCT between 3000K,4000K and 6000K output

Pre-wired with 1.5 metre cable

Adjustable suspension points c/w suspension kit

1-10v dimmable as standard

LED lifespan L90 36,000 hours

General Information

Lamp Type	LED
Colour / Finish	Aluminium
IP Rating	IP20
Class Protection	2
Internal / External	Internal
Surface / Recessed / Suspended	Suspended
Warranty (Years)	3
CE Mark	Yes
Length (mm)	1200
Width (mm)	55
Height (mm)	75
Accessories	AVASLED/LC, AVASLED/90, AVASLED/90/B

Technical Information

Wattage	50W
Lumens Delivered	4798lm(Warm White), 5283lm(Cool White), 4908lm(Daylight)
Lm/W	96lm(Warm White), 106lm(Cool White), 98lm(Daylight)
CRI	Ra 80
CCT	3000K/4000K/6000K
Input	230V
Hertz	50Hz
Operating Temp	-20°C to 45°C

Technical Data - ETIM - Ceiling-/wall luminaire (EC002892)

Suitable for wall mounting	No
Suitable for suspended mounting	Yes
Suitable for ceiling mounting	Yes
Suitable for built-in mounting	No
Suitable for surface mounting	No
With light source	Yes
Material housing	Aluminium
Colour housing	Aluminium
Nominal voltage	230-230 V
Control gear included	Yes
No dim function	Yes
Light distributor	Diffuser lens/optic/panel
Degree of protection (IP)	IP20
Protection class	II
Suitable for emergency lighting	No
With movement sensor	No
With light sensor	No
Max. system power	50 W
Colour of light	White
Colour temperature	3000-6000 K
Colour rendering index CRI	80-89
Width	55 mm
Height/depth	75 mm
Length	1200 mm

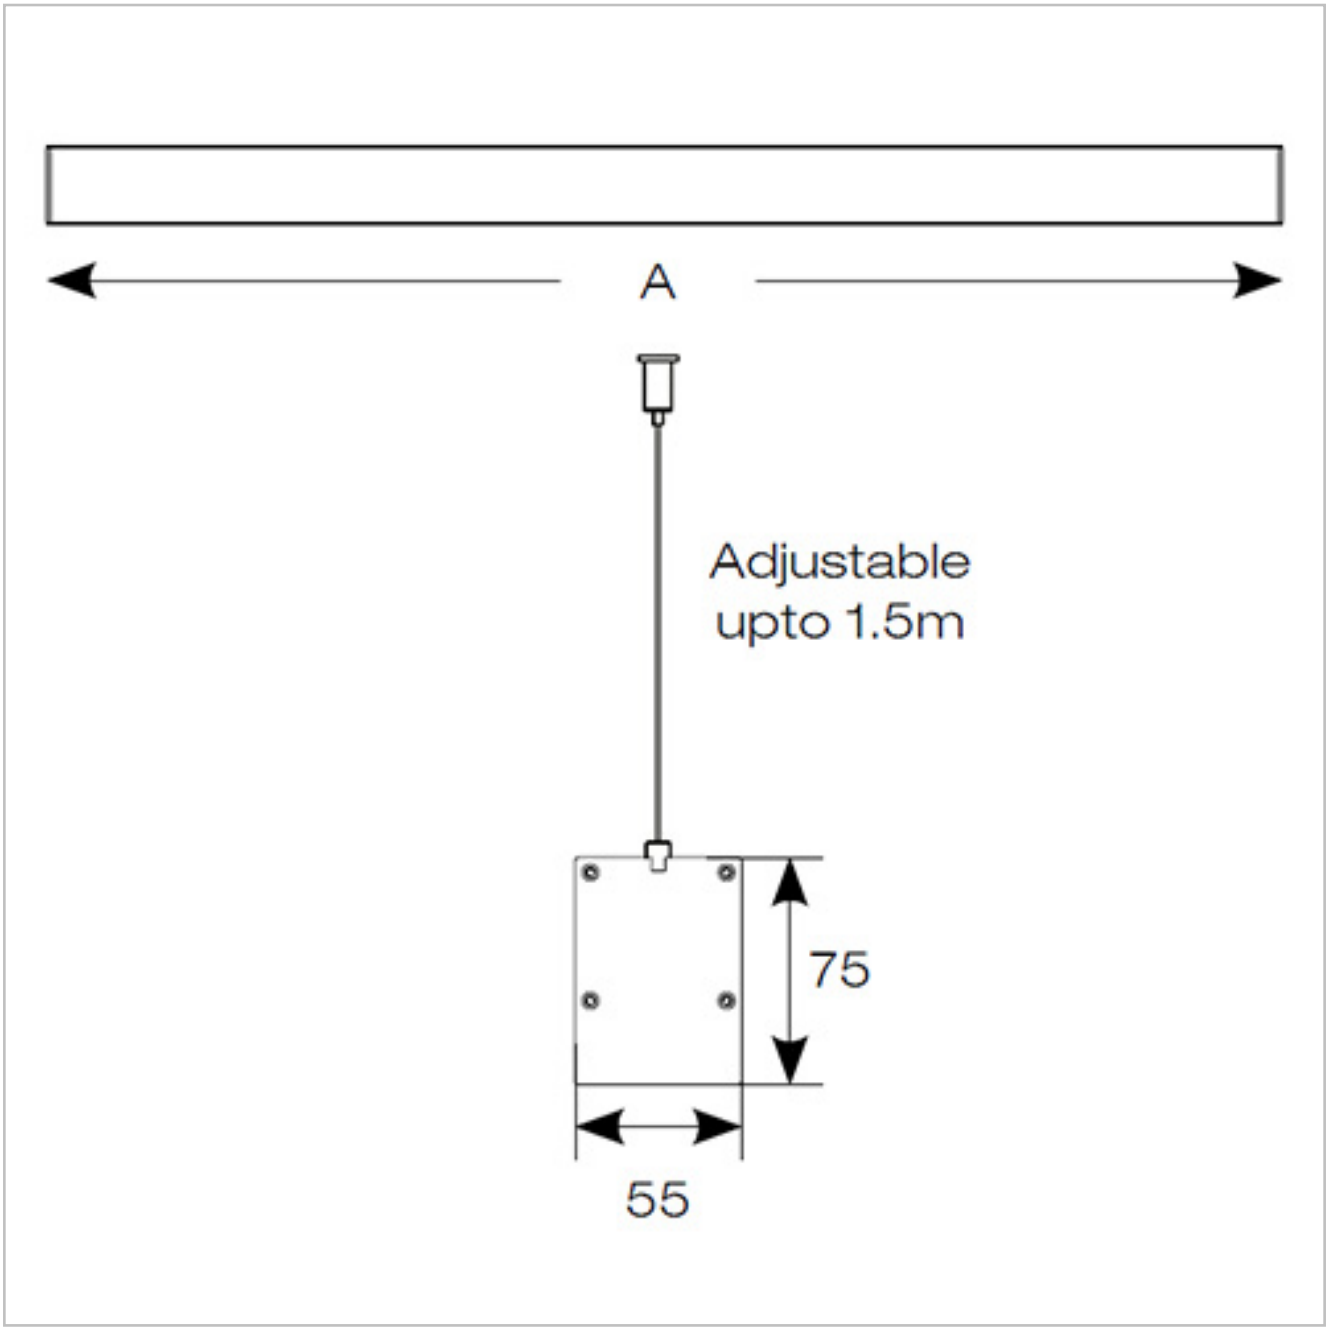

Datasheet generated from https://onetimepim.com last updated Monday, September 6, 2021 2:18:11 PM