

Object :
Installation :
Project number :
Date :



1 Luminaire data

1.1 ANSELL Lighting, Three Circuit Unity 1 LED Mains (A/3ULEDS1)

1.1.1 Data sheet

Manufacturer: ANSELL Lighting

A/3ULEDS1 Three Circuit Unity 1 LED Mains


Luminaire data

Luminaire efficiency : 85%
Luminaire efficacy : 62.73 lm/W
Classification : A80 ↓99.4% ↑0.6%
CIE Flux Codes : 100 100 100 99 85
UGR 4H 8H : <10.0 / 11.6
Power : 15 W
Luminous flux : 941 lm

Dimensions : Ø60 mm x 135 mm

Equipped with

Quantity : 1
Designation : RA90 4000K
Colour :
Luminous flux : 1107 lm

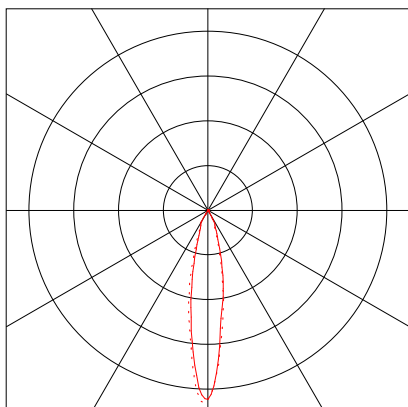


Object :
Installation :
Project number :
Date :



1.1 ANSELL Lighting, Three Circuit Unity 1 LED Mains (A/3ULEDS1)

1.1.2 LDC

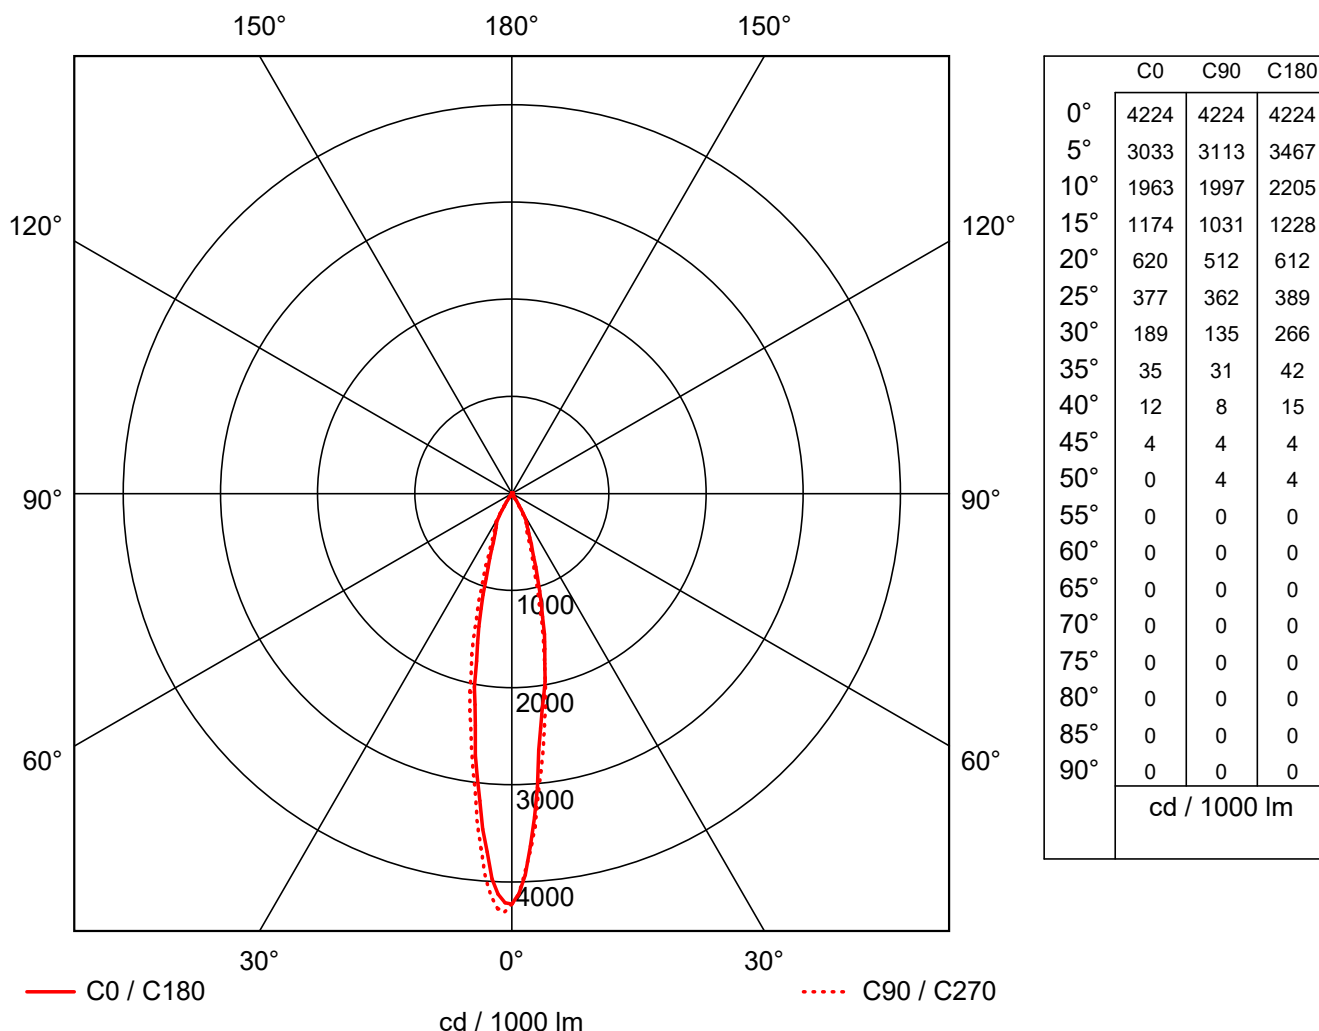

Manufacturer : ANSELL Lighting
Order number : A/3ULEDS1
Luminaire name : Three Circuit Unity 1 LED Mains
Equipment : 1 x RA90 4000K 15 W / 1107 lm
Dimensions : D 60 mm x H 135 mm
File name : rlx_20170830213938.ltd

Efficiency factor : 85%
Luminaire efficacy : 62.73 lm/W (A80)
Light distribution : 8.6° C0
Beam Angle : 9.3° C90
10.3° C180
11.7° C270