



1 Luminaire data

1.2 Ansell Lighting, COMMERCIAL - Pace LED TPa... (APACLED1/60/WW)

1.2.1 Data sheet

Manufacturer: Ansell Lighting

APACLED1/60/WW

COMMERCIAL - Pace LED TPa UGR<19 Backlit Recessed Panel


Luminaire data

Luminaire efficiency : 100%
Luminaire efficacy : 110.68 lm/W
Classification : A50 ↓99.1% ↑0.9%
CIE Flux Codes : 61 86 97 99 100
UGR 4H 8H : 17.9 / 17.9
Power : 28 W
Luminous flux : 3099 lm

Equipped with


Quantity : 1
Designation : 3099 lm, 28 W
Colour :
Luminous flux : 3099 lm

Dimensions : 553 mm x 553 mm x 1 mm

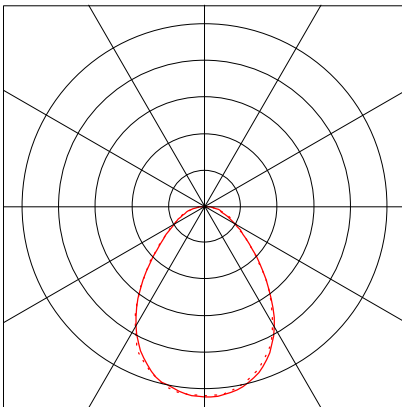

1.2 Ansell Lighting, COMMERCIAL - Pace LED TPa... (APACLED1/60/WW)

1.2.2 LDC

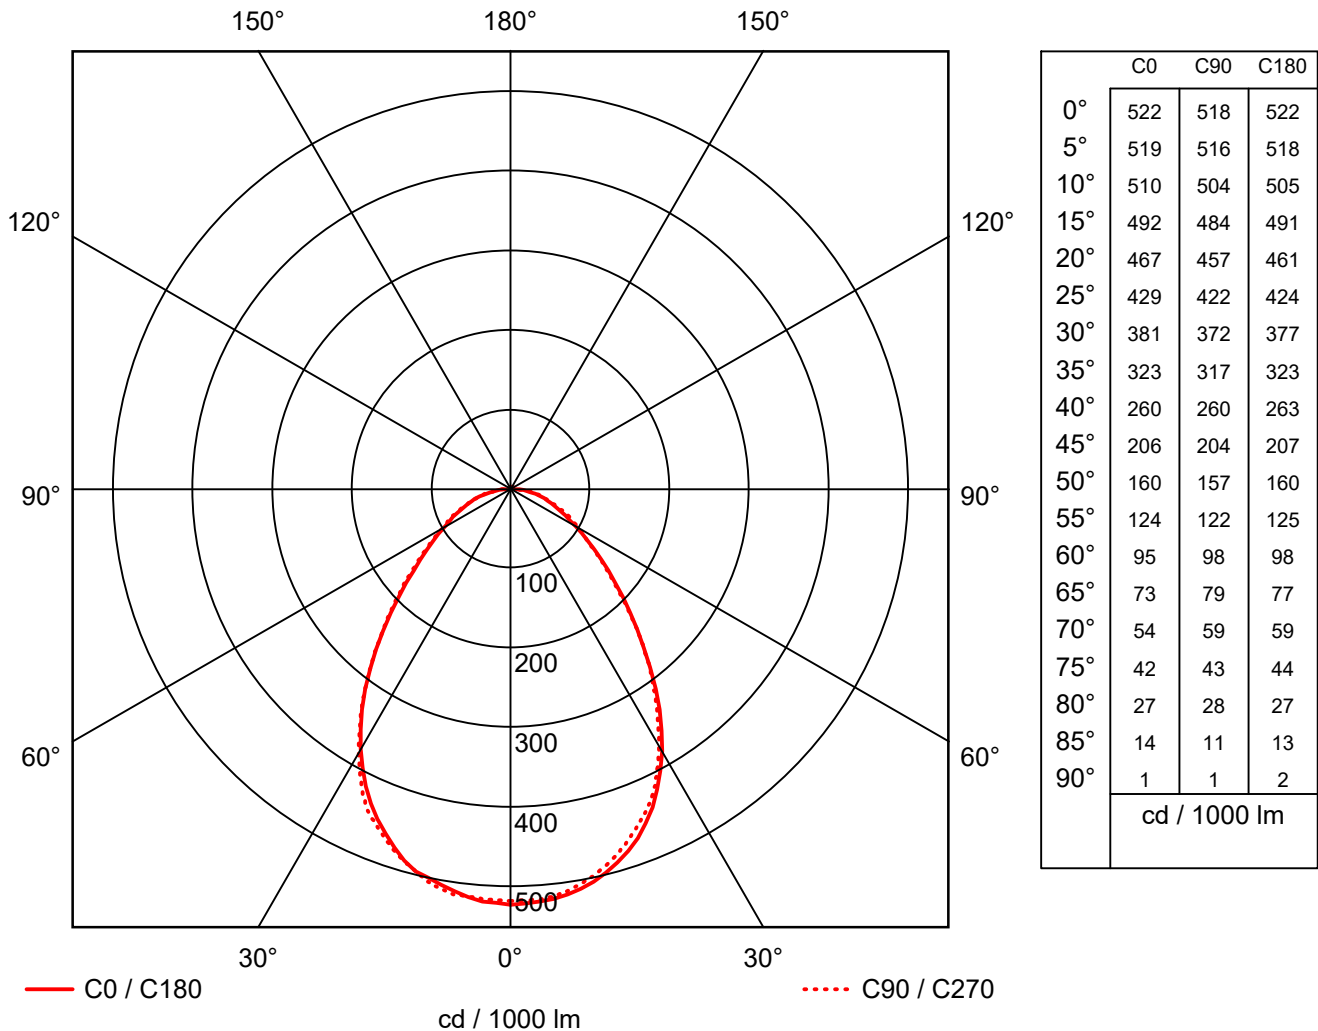

Manufacturer	: Ansell Lighting	Efficiency factor	: 100%
Order number	: APACLED1/60/WW	Luminaire efficacy	: 110.68 lm/W(A50)
Luminaire name	: COMMERCIAL - Pace LED TPa UGR<19 Backlit Recessed Panel	Light distribution	:
Equipment	: 1 x 3099 lm, 28 W 28 W / 3099 lm	Beam Angle	: 39.9° C0 39.8° C90
Dimensions	: L 553 mm x W 553 mm x H 1 mm		40.1° C180
File name	: rlx_20200804084307.Idt		40.3° C270