


Setting Up Install Times

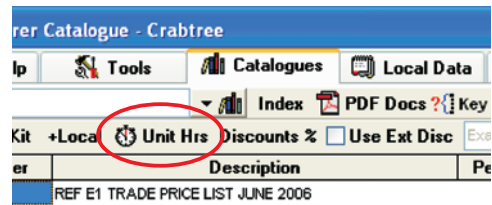

For some items you may wish to enter a whole set of install options to show the different install times for the different conditions in which the item is being installed e.g. on brick, wood, plaster etc. Electrika allows you to enter up to 5 of your own install times for every item.

Using the arrow keys highlight the item for which you wish to set up install options and click on the **Clock** button. The first two entries are reserved and cannot be edited.

Step 1
Type in a heading or choose one from the drop down list.

Step 2
Type in a heading or choose one from the drop down list.

Step 3
Position the highlight under the **Minutes** or **Hours** column and enter the time it takes to install each unit of the item.

Step 4
Repeat steps 1-3 for rows 2-5 to create the other install options.

Step 5
Choose how you wish to apply the Install Time by selecting one of the options and then click the Apply button

When you click here your set-up will be stored and the default time will appear next time you use the item

Install times setup
 Item: 4304/3D 13A Switched Socket Outlet 1 gang DP socket + neon

	Heading 1 e.g. Fixed to brick	Heading 2 e.g. Per M	Hours	Minutes
	INSTALL TIME FROM MANUF DATABASE		0.000	0.0
	INSTALL TIME ASSIGNED FROM ITEM ENTRY		0.000	0.0
1	Fixed To Brick	Each	0.000	0.0
2			0.000	0.0
3			0.000	0.0
4			0.000	0.0
5			0.000	0.0

How do you wish to apply the install times?

Apply to this item only

Apply to this item and to the next item(s)

Apply to all items with Sub Index: 13A Switched Socket Outlets

Apply to all items with Main Index: Power & Control - Capital

IMPORTANT: Install times are assigned by Cat Number.
 Items with the same Cat Number will get the same install times even if they are not in the above groups.